


# MLRK1-YAL6

- WORKS ON ALL YALE 6000 SERIES EXIT DEVICES
- FAST, QUIET, SMOOTH & STRONG!
- 1 & ONLY MOTORIZED LATCH RETRACTION OPTION AVAILABLE ON THE MARKET
- UL LISTED
- OPTIONAL BUILT-IN REQUEST TO EXIT
- 3 YEAR NO HASSLE WARRANTY

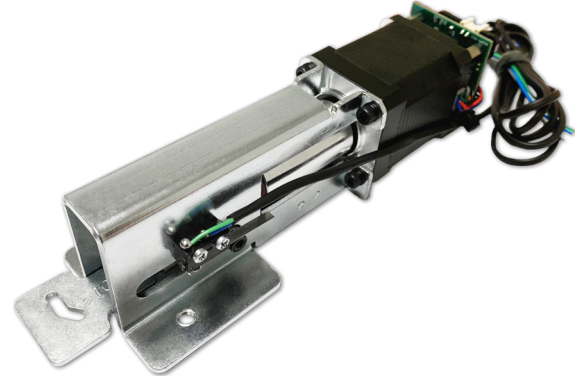

The **MLRK1-YAL6** is a practical and cost-effective way to convert a mechanical Yale 6000 series device to a motorized latch retraction device, while maintaining the listing. Our easy-to-install motor-driven kit installs in minutes & includes an optional built-in request to exit. It is equipped with push-to-set (PTS) technology allowing for an easy post-installation adjustment of the latch/latches. Last but not least, the YAL6 features an updated MM module, energy conscious while still being capable of getting tough jobs done!

## SPECIFICATIONS

**VOLTAGE RANGE** – 24 TO 28 VDC

**SYSTEM PROTECTION** – UNIT SHUTDOWN WHEN VOLTAGE EXCEEDS 28VDC

**STANDARD** - AVERAGE CURRENT PEAK: 900MA, AVERAGE CURRENT HOLD: 215MA

**PTS ADJUSTMENT** – APPROX. 1/4"

**WIRE RUN:** 300' WITH 18GA WIRE

**PRODUCT DETAILS:** Box: 10.5" x 3.75": x 2.5"

**WEIGHT:** 2 Lbs

**15 MASTER PACK:** Weight: 30 Lbs 12.75" x 11.75" x 11"

**CUTDOWN DETAILS:** 36"/ 48" - 6.5" FILLER PLATE NEEDED

## ACCESSORIES

- REQUEST TO EXIT (YAL6REXKIT-ED) - OPTIONAL BUILT-IN

## FEATURES

- **NEXT GENERATION MM4S SMART MODULE:** ON BOARD DIAGNOSTICS WITH AUDIBLE FEEDBACK FOR ADJUSTMENT AND POWER ISSUES
- **"PTS":** 2 SECOND ELECTRONIC ADJUSTMENT FOR EASY POST INSTALLATION ADJUSTMENT. SIMPLIFIED FURTHER WITH A PUSH BUTTON TO ENGAGE PROGRAMMING & SHORTER PROGRAM SEQUENCE.
- **STANDARD TORQUE MODE:** NOW CAPABLE OF PULLING ALL TYPES OF DEVICES, EVEN THE DIFFICULT TALL VERTICAL RODS DOORS!
- **ELECTRIC DOGGING** RATED FOR CONTINUOUS DUTY - **AUTO RE-ENGAGE** IF PUSH PAD IS PULLED FROM DOGGED POSITION
- **UP TO 300'** WIRE RUN WITH 2-18GA WIRE - LONG WIRE RUNS PROVIDES INSTALLER WITH CONVENIENCE OF PLACING THE **COMMAND** LOCKING HARDWARE POWER SUPPLY IN A CENTRALIZED LOCATION; I.E. THE SAME CLOSET AS THE ACCESS CONTROL PANEL
- **6"** CABLE WITH ROBUST **QUICK MOLEX** CONNECTOR FOR **MM4S** MODULE TO **6'** POWER LEAD TO EASILY CONNECT TO POWER SUPPLY LEAD.

# MLRK1-YAL6 MATRIX

YAL6 will work in new installations and as a replacement for installations with existing electrifications, matrix lists available options.

<b>Mechanical Device</b>	<b>Yale Motorized Device</b>
✓	N/A

## How to Order

<b>PART #</b>	<b>EASY ORDER #</b>	<b>DESCRIPTION</b>
<b>MLRK1-YAL6</b>	<b>72506</b>	<b>Kit for Yale 6000 36" &amp; 48". EU 24V</b>
<b>MLRK1-YAL6-REX</b>	<b>72559</b>	<b>Kit for Yale 6000 36" &amp; 48". EU 24V w/ REX</b>

### NEED LOCKING HARDWARE POWER SUPPLIES? WE'VE GOT A FEW RECOMMENDATIONS

- PS440B**
- PS204/PS204B**
- PS-4**
- PS480B**
- PS210**
- PS5-8**
- PS1**
- PS220/220B**

