# disc tumbler door & drawer locks

C8703, C8705

C8803



C8706

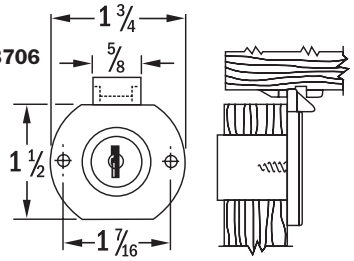





**APPLICATION** – For drawers and doors. Surface mounted. Requires 7/8" diameter hole for cylinder.
**OPERATION** – Key removable in both locked and unlocked positions except C8706.
**KEYING** – Will key together with all other disc tumbler locks using D8785 key blank. See table for available keying. Master keying to E41A using D8783 key blank.

**PACKAGING** – Supplied with two keys and mounting screws. C8706 furnished with strike. If trim ring is required, order C2017 separately.




MOUNTING HOLE

C8704




| Part No. | Installation | Bolt Type | Cylinder Length | Bolt Travel | KA* Codes | Key Changes KD | Key Changes MKKD | | Reference Number | Non MK Key Blank |
|---|---|---|---|---|---|---|---|---|---|---|
| C8703-14A | Drawer | Dead | 15/16" | 11/32" | 6 | 200 | 200 | | M4-6707-170 | D8785 |
| C8703-3 | Drawer | Dead | 15/16" | 11/32" | 6 | 200 | 200 | | M4-6707-170 | D8785 |
| C8703-4G | Drawer | Dead | 15/16" | 11/32" | 6 | 200 | 200 | | M4-6707-170 | D8785 |
| C8704-14A | Door | Dead | 15/16" | 11/32" | 6 | 200 | 200 | | M4-6707-172 | D8785 |
| C8704-3 | Door | Dead | 15/16" | 11/32" | 6 | 200 | 200 | | M4-6707-172 | D8785 |
| C8704-4G | Door | Dead | 15/16" | 11/32" | 6 | 200 | 200 | | M4-6707-172 | D8785 |
| C8705-14A | Drawer | Dead | 1-3/16" | 11/32" | 3 | 200 | 200 | | M4-6707-171 | D8785 |
| C8705-3 | Drawer | Dead | 1-3/16" | 11/32" | 3 | 200 | 200 | | M4-6707-171 | D8785 |
| C8705-4G | Drawer | Dead | 1-3/16" | 11/32" | 3 | 200 | – | | M4-6707-171 | D8785 |
| C8706-3 | Drawer | Spring | 15/16" | 9/32" | 3 | 200 | – | | M4-6708-170 | D8785 |
| C8803-14A | Drawer | Dead | 15/16" | 11/32" | 6 | 200 | 200 | | M4-8803-001 | D8785 |
| C8803-3 | Drawer | Dead | 15/16" | 11/32" | 6 | 200 | 200 | | M4-8803-001 | D8785 |
| C8803-4G | Drawer | Dead | 15/16" | 11/32" | 6 | 200 | 200 | | M4-8803-001 | D8785 |

*Key Codes used: 3 Codes – C346A, C413A and C415A.
6 Codes – C346A, C390A, C413A, C415A, C420A and C642A.

# disc tumbler gang lock

Cylinder is located near top of pedestal.

Saddle reverses for mortise application.

D8090




MOUNTING HOLE

Additional 7/8" x 1/8" deep dado for bar required on inside of panel.

**APPLICATION** – For locking drawers in desk pedestals and other multiple drawer applications. Requires 7/8" diameter hole for cylinder and dado for bar, measuring 7/8" x 1/8" deep on inside of panel.
**OPERATION** – Key removable in both locked and unlocked positions. Turning the key locks all drawers simultaneously (drawers must be in closed position). Bar moves studs into notch in drawer or slide, thus preventing drawer movement.
**KEYING** – Will key together with all other disc tumbler locks using D8785 key blank. See table for available keying. Master keying to E41A using D8783 key blank.
**PACKAGING** – Supplied with two keys, three locking studs, three stud slides, saddle and mounting screws. If trim ring is required, order C2017 separately.

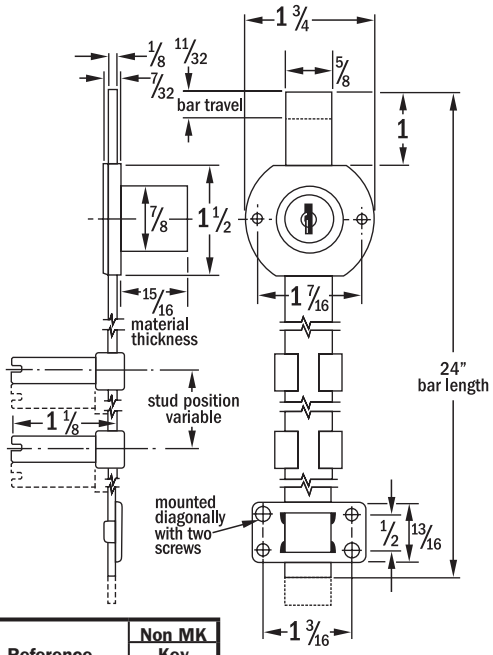


| Part No. | Installation | Bar Operation | Cylinder Length | Bar Travel | KA* Codes | Key Changes KD | Key Changes MKKD | | Reference Number | Non MK Key Blank |
|---|---|---|---|---|---|---|---|---|---|---|
| D8090-14A | Desk Pedestals or Similar Multi-Drawer Conditions | Dead Locking | 15/16" | 11/32" | 6 | 200 | 200 | | M4-6709-124 | D8785 |
| D8090-3 | | | 15/16" | 11/32" | 6 | 200 | – | | M4-6709-124 | D8785 |
| D8090-4G | | | 15/16" | 11/32" | 6 | 200 | – | | M4-6709-124 | D8785 |

*Key Codes used: 6 Codes – C346A, C390A, C413A, C415A, C420A and C642A.