
Catalog Number	11532
UPC Number	60198611532
Description	Non-Insulated Fork Spade Terminals 12-10 AWG




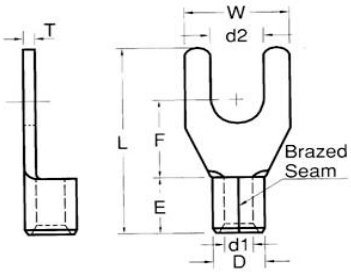

Features		
Manufactured from high strength copper alloy		
Electro-tin plated for corrosion resistance		
Wire range stamped on the surface for easy interpretation		
Brazed seam prevents splitting under maximum pressure		
Serrated barrel provides excellent electrical contact and pull-out resistance characteristics at barrel		
General		
Insulation Type	N/A	
Material	Copper	
Finish	Electro-tin plated	
Color	N/A	
Wire Range	12-10 AWG	
Stud Size	#6	
Dimension Information		
L Inches (mm)	0.728	
W Inches (mm)	0.327	
D Inches (mm)	0.22	
d1 Inches (mm)	0.134	
d2 Inches (mm)	0.146	
E Inches (mm)	0.236	
F Inches (mm)	0.276	
T Inches (mm)	0.039	
Specifications		
Temperature Rating	150°C	
Voltage Rating	600 V	
Flammability Rating	N/A	
Amp Rating	12 AWG	35 Amps
	10 AWG	50 Amps
Packaging		
Bag Qty	100	
Master Bag Qty	1000	
Certifications		
UL	Yes	
cUL	Yes	
RoHS	Yes	

Morris Products 53 Carey Road, Queensbury, NY 12804
www.morrisproducts.com

REV	DESCRIPTION	DATE
1	RDK-96036	2007/12/21
2	RDK-97127	2008/09/19
3	RDK-98020	2009/09/02

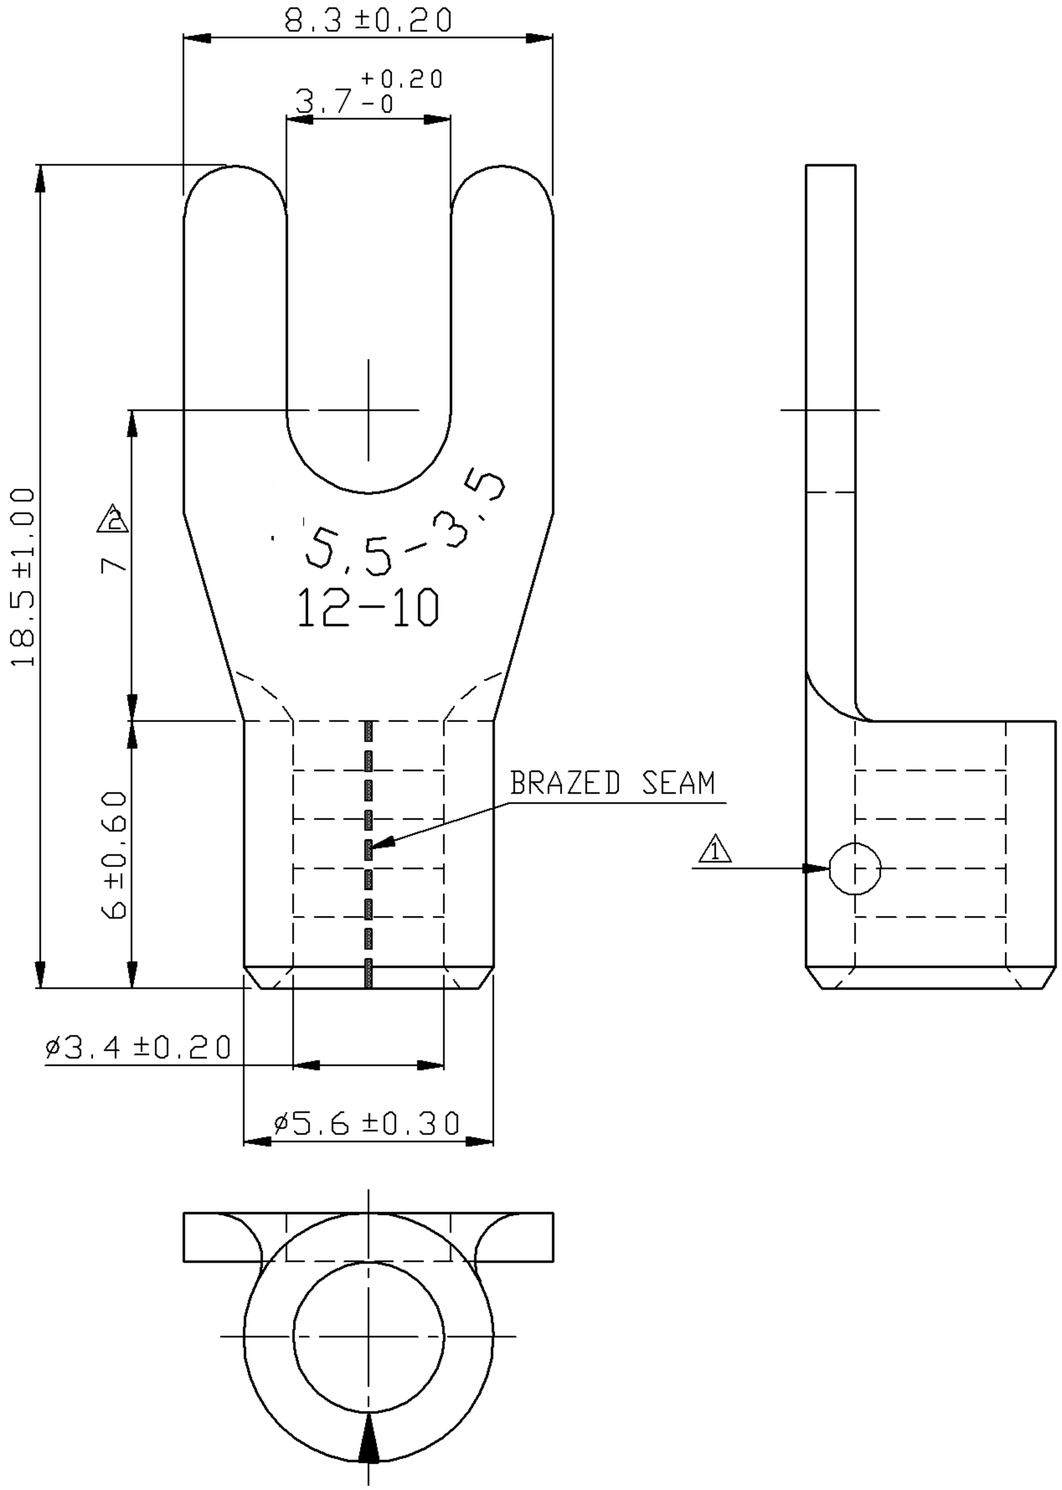

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	12	10		
AMP.	35	50		

2. WIRE RANGE : 12-10 A.W.G. (4 - 6 mm^2)
3. SURFACE TREATMENT : TIN PLATED
4. THICKNESS : 1.00 mm

3 Tolerance Unless Otherwise Specified	
0 > mm ±	ANGLE
> mm ±	0° > ° REF ±
> mm ±	°> ° ±
> mm ±	°> ° ±

NAME	NON-INSULATED SPADE TERMINALS				UNIT	mm
PART NO.	11532	MATERIAL	COPPER		APPROVE	
NUMBER		SCALE	SHEET	PAGE	CHECKED	
DATE	2008/01/29	5/1	1-3	1OF2	DRAWN	

Morris Products Inc.
53 Carey Rd. Queensbury, NY 12804