




Catalog Number 21752 - 21756
UPC Number
Description Anti-Short Bushings
Polypropylene



Features	
•	Polypropylene
•	Tapered Slotted Design for easy Insertion & Positive Grip
•	Horizontal Flange Protects against Metal Burrs
•	Excellent Chemical & Temperature Characteristics

General	
Material:	Polypropylene

Dimension Information	
	See Engineering Dwg




Specifications	
Flammability Rating:	UL 94V-2
Temperature Rating:	194°C

Packaging	
Bag Qty	See Table

Certifications	
UL	Yes
CSA	Yes
ROHS	

Cat No.	Size	Cable Sizes	A	B	C	D	Bag Qty	
21752	0	14/2, 14/3, 12/2	0.56"	0.671"	0.38"	0.312"	35	
21753	1	14/4, 12/3, 6/1, 4/1	0.65"	0.671"	0.45"	0.312"	35	
21754	2	12/4, 10/2, 10/3, 2/1	0.61"	0.859"	0.58"	0.125"	35	
21755	3	10/4, 8/2, 8/3, 1/1	0.67"	1.046"	0.79"	0.109"	20	
21756	4	8/4, 6/4, 6/3, 6/2, 4/3, 4/2	0.83"	1.266"	1.00"	0.156"	16	

REVISION	DESCRIPTION	DATE	BY	APP'D
REV 1	FOR REVISIONS SEE SHEET 1 OF 2			

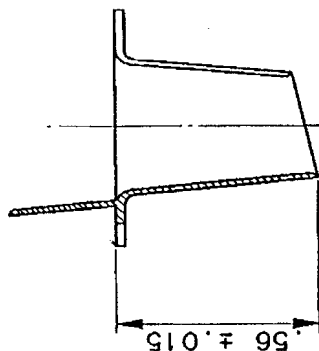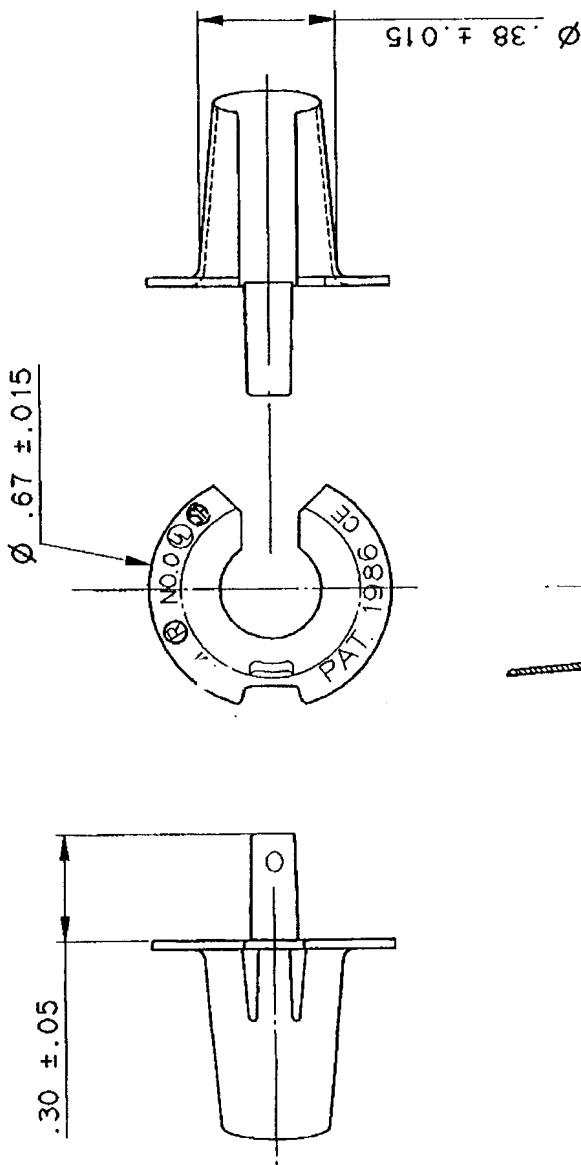

UNLESS NOTED, ALL DIMENSIONS ARE IN INCHES		TOLERANCES .XX = $\pm .015$.XXX = $\pm .007$ ANGLE = $\pm 1/4^\circ$		MORRIS		Morris Products Inc. Queensbury NY 12804	
DATE	28.12.91	NAME	TOPOLSKY	SCALE	2X 4X	TITLE ANTISHORT BUSHING NO.0 FLAT FLANGE	
DR IN		CHK'D		APPROV		SHEET 2 OF 2 REV F ISS 8	
MATERIAL THERMOPLASTIC				SIZE B		PAGE NO. 47	
FINISH SPI NO. 3				21752			

PARTS ARE CSA AND UL APPROVED