




**Morris CAT#: 22280-22293**  
**Nylon Cable Glands -**  
**Multi-Conductor -**  
**NPT Thread 5 Hole**

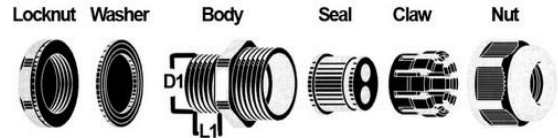

**Features:**

- Multi-Hole Design organizes multiple cables within a gland
- Seal & Clamp System allows the cord connector to tighten in a circular sequence on the sealing ring to give outstanding strain relief without twisting or damaging the cable
- Simply push the cable through the liquid-tight Nylon strain relief & tighten locknut for quick installation
- Threads into your panel for clearance
- Internal Ratchet with Self-Locking Feature protects against vibrations
- Screw cable glands into NPT Thread (National Pipe Thread)
- Watertight
- 'Collet' design of body accommodates various size cords, cables, tubing, etc.

- Nylon NPT thread cable glands body material is resistant to most common chemicals & solvents
- For best results, use the minimum size that fits into your cable
- Easy to Assemble
- Wide Clamping Range
- No disassembly required
- Made of UL approved NYLON 66
- IP68 Rated Submersible & Dustproof
- UL Recognized
- Flammability Rating: 94V-2
- -22°F to 140°F Temp Rating
- UV Resistant Black
- Locknut Not Included (Sold Separately)

DIMENSIONS = INCHES

CAT. NO.	NPT THREAD	CABLE RANGE	DI	LI	BAG QTY	MASTER BAG
<b>5 HOLE GLAND</b>						
22280	3/8-18	.079 - .110	.66	.57	10	100
22281	1/2-14	.051 - .079	.83	.51	10	100
22282	1/2-14	.079 - .110	.83	.51	10	100
22283	1/2-14	.118 - .161	.83	.51	10	100
22284	3/4-14	.047 - .079	1.04	.57	10	100
22285	3/4-14	.079 - .122	1.04	.57	10	100
22286	3/4-14	.118 - .161	1.04	.57	10	100
22287	3/4-14	.142 - .181	1.04	.57	10	100
22288	3/4-14	.181 - .236	1.04	.57	10	100
22289	1-11.5	.102 - .142	1.31	.59	10	100
22290	1-11.5	.142 - .181	1.31	.59	10	100
22291	1-11.5	.181 - .237	1.31	.59	10	100
22292	1-11.5	.237 - .315	1.31	.59	10	100
22293	1-1/4-11.5	.256 - .327	1.65	.72	10	100

[www.morrisproducts.com](http://www.morrisproducts.com)

1-888-777-6678