

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.
Rixson® is a registered trademark of Yale Security Inc., an ASSA ABLOY Group company. Copyright© 1990, 2009, Yale Security Inc., an ASSA ABLOY Group company.
All rights reserved. Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.

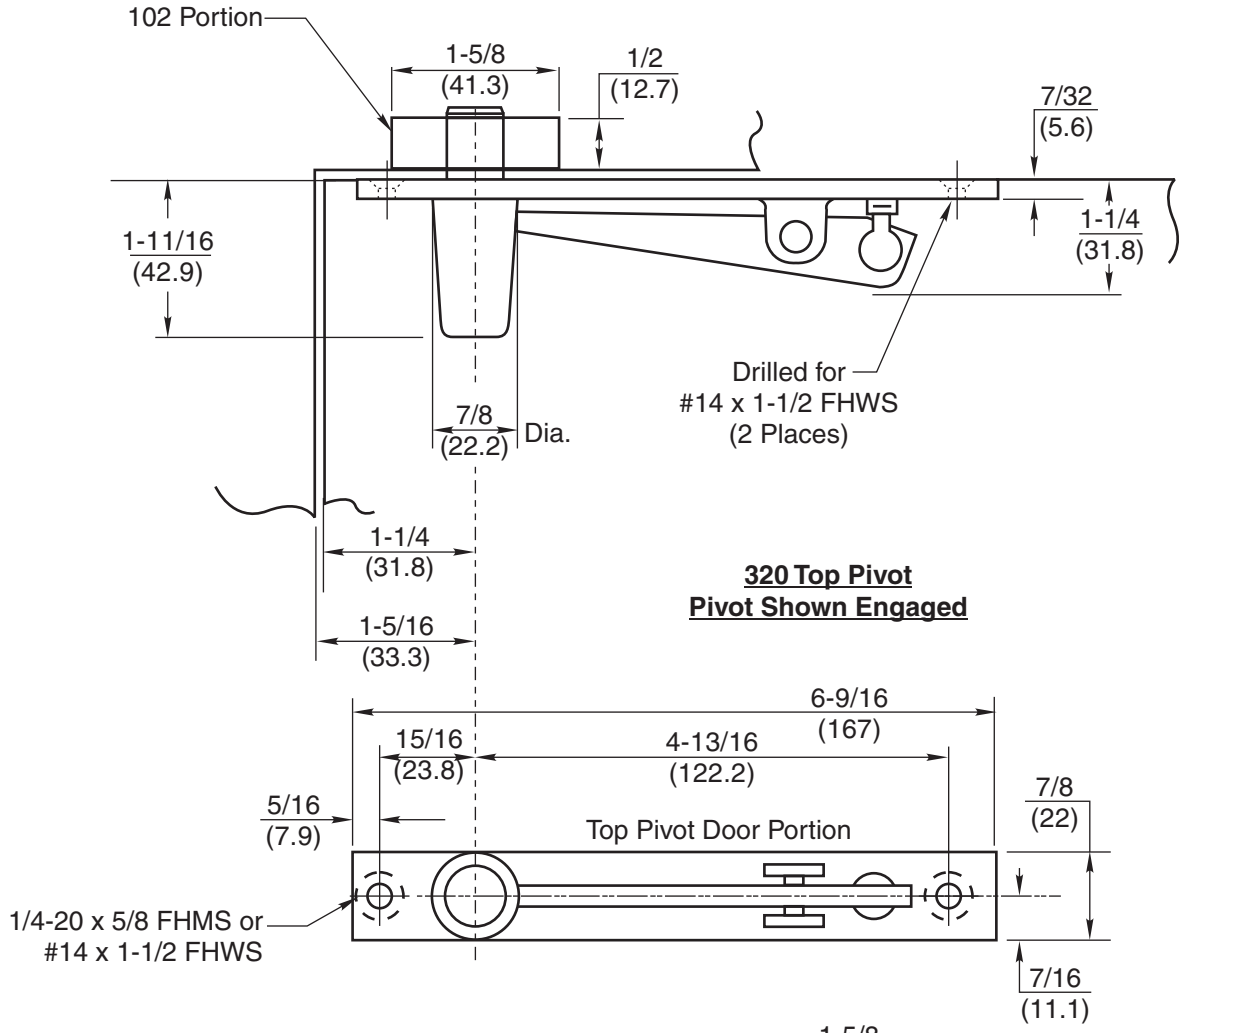

320 Top Pivot
Pivot Shown Engaged

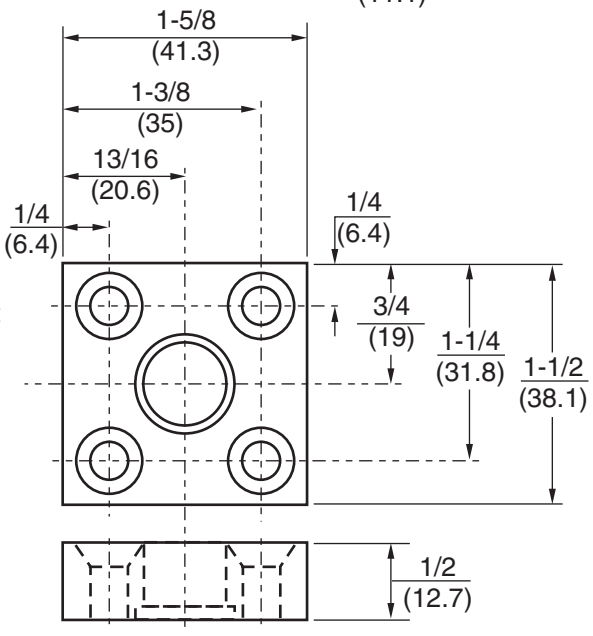

Frame Portion

Installation Instructions:

1. Pivot point determined by bottom pivot or floor closer.
2. Prepare door and frame per details shown.
3. To insure proper operation of door, the centerline of the top pivot pin must be straight and plumb with bottom spindle.
4. Install walking beam with pin retracted.
5. Install 102 portion.
6. Place door on bottom pivot and raise door to vertical position.
7. Engage top pivot pin by turning adjusting screw clockwise when door portion is in alignment with the jamb portion.

Notes:

1. Do not scale drawing.
2. Dimensions are given in inches (mm).
3. Centerline may vary. See bottom pivot or floor closer for its centerline.

320 x 102 Top Pivot
Center Hung
Non Handed

RIXSON
ASSA ABLOY
www.rixson.com

TEMPLATE NUMBER	DATE
IS-320x102	07-09