



A WATTS Brand

S19-788H Series

Heated Portable Pressurized Eyewash Units

- Meet or exceeds American National Standard Z358.1 as an eyewash
- Can retrofit to any 15-gallon pressurized tank with eyewash option only (without drench hose option)
- Full, One-Year Warranty

Specifications

Insulated heater jacket thermostatically controls water in weather conditions down to -10°F (-23°C). Uses a standard 120VAC grounded power cord. Unit operates by activating the large, highly visible, push handle. Highly visible, yellow insulated jacket made of 200 Denier foam-backed nylon oxford w/clear vinyl pocket for electrical connections. Eyewash yoke wrapped with heat trace cable and lined with pipe insulation for further freeze protection. Silicone rubber drum heaters have tension spring and hook fasteners.

- ☒ **Heated portable pressurized eyewash units are not rated for outdoor use.**

Standard Equipment

Tank Jacket and Eyewash Yoke Jacket

Highly visible yellow waterproof insulated jacket made of 200 Denier foam-backed nylon w/clear vinyl pocket.

Heaters

510-watt drum heaters made of silicone rubber with tension spring and hook fasteners.

Dual Thermostat


75°F +/- 5° normal operation thermostat in series with 90°F +/- 5° high limit, manually reset thermostat.

Electric Heat Trace Cable

Self-regulated to -50°F, thermal rating - 5 watts/foot, service voltage - 120VAC, amperage/wattage - .7 AMP/80 watts at 50°F unit water temperature.

Pipe Wrap

1.5" OD pipe insulation, 3/8" thick

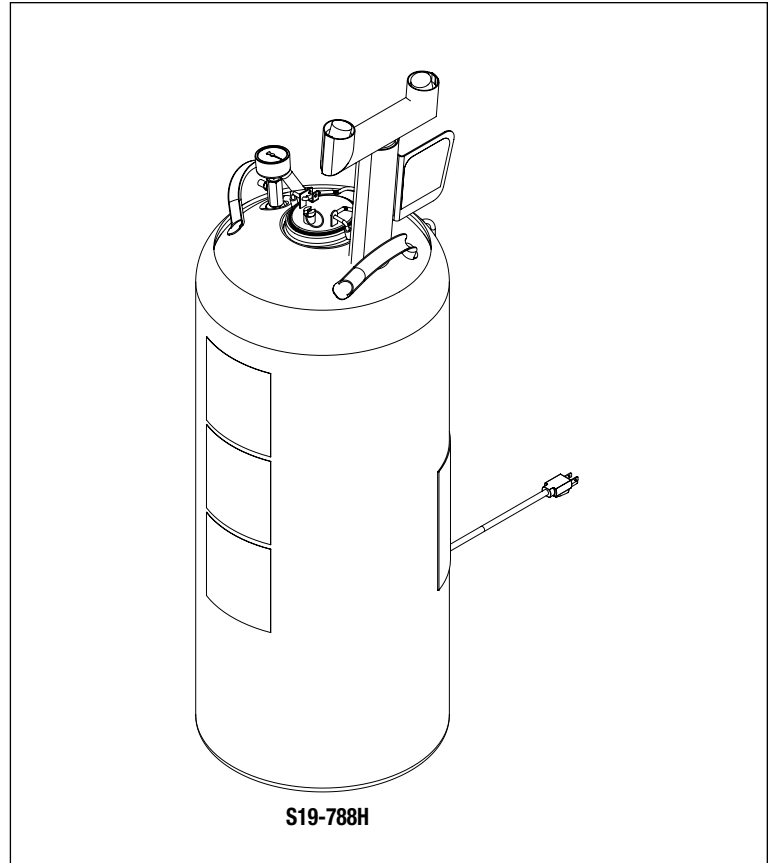

Model	Description
☐ S19-788H	Heated 15-Gallon Portable Pressurized Eyewash (Tank with Heater Jacket)
☐ S19-788HR	Heated 15-Gallon Retrofit Kit (Heater Jacket only)



A WATTS Brand

S19-788H Series

Heated Portable Pressurized Eyewash Units

Model S19-788H

