

16-4 Unshielded Audio Cable Non-Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: CH1023F

Applications:

This document establishes the specifications for a four conductor cable used in communication applications

Construction Details:

Number of Conductors: 4/C
Conductor: 16 AWG 65/34 Bare Copper
Insulation Material: Polyvinyl Chloride
Nominal Insulation Thickness: 0.012 in.
Nominal Insulation Diameter: 0.080 in.
Color Code: Black, Red, White, Green
Jacket Material: Polyvinyl Chloride
Nominal Jacket Thickness: 0.018 in.
Nominal Diameter: 0.238 in.
Surface Print: 3122598 HI-STRAND AUDIO
CABLE 4 COND 16AWG 65
STRAND CM/CL3 75°C
C(ETL)US FT4 MADE IN USA...
SUITABLE FOR OUTDOOR USE...
OXYGEN FREE COPPER
+ Sequential Footage Marking

Electricals:


Suggested Working Voltage: 300 Volts, rms.

Technical Details:

Temperature Rating

Operation -20°C to +75°C

Nominal Weight: 50 lbs. / 1,000 Feet

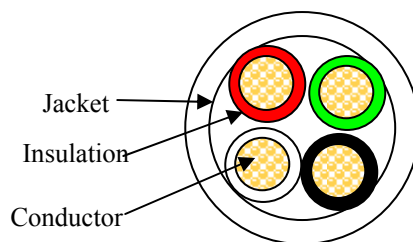

Standards:

- NEC Article 800
- UL Subject 444, Type CMR/CL3R FT4

Codes & Listings:

- C(ETL)US Type CM/CL3 FT4

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.



MADE IN THE USA



Issue Date: 03/11
Revision: 5

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.