




**Catalog Number** 10710  
**UPC Number** 60198610710  
**Description** .156" Nylon Insulated 2 Way Bullet Receptacle



#### Features

- Clear Nylon insulation
- Manufactured from high strength brass
- Electro-tin plated for corrosion resistance
- Easy entry funnel type eliminates strand "Hang Up", increases the crimping rates and the reliability of the wire
- Crimping barrel & flared position of sleeves provide excellent contact & mechanical stress relief at insulation & barrel junction

#### General

Insulation Type Nylon  
Material Brass  
Finish Electro-Tin Plated  
Color Clear  
Wire Range  
Tab Size 0.156

#### Dimension Information

L Inches (mm) 1.26  
W Inches (mm) 0.307

#### Specifications

Temperature Rating 105°C  
Voltage Rating 600 V  
Flammability Rating UL94V-O  
Amp Rating 15 Amps

#### Packaging

Bag Qty 100

#### Certifications

UL Yes  
cUL Yes  
RoHS Yes




Morris Products 53 Carey Road, Queensbury, NY 12804

[www.morrisproducts.com](http://www.morrisproducts.com)



REV	DESCRIPTION	DATE
-----	-------------	------

1  
2  
3  
4  
5  
6

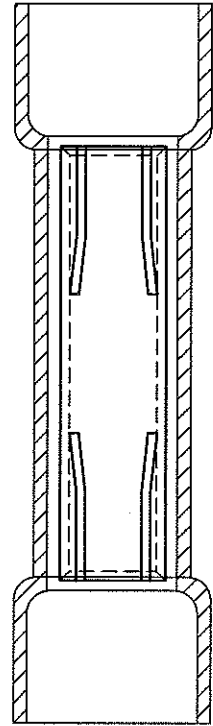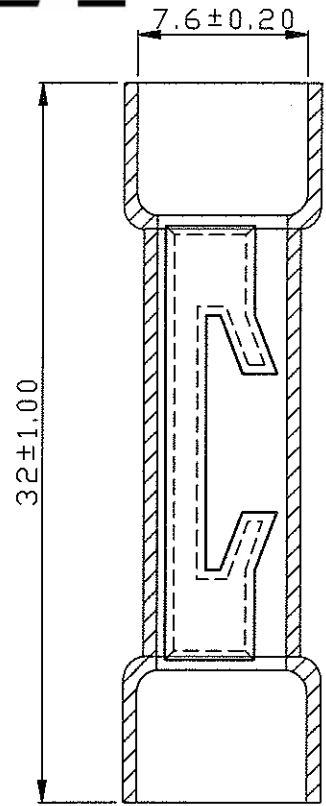

- NOTE :
1. LR : LOOSE PIECE, STANDARD CHEMICAL TREATMENT ( BRASS FINISH )  
LT : LOOSE PIECE, TIN PLATED
  2. TERMINAL MATERIAL : BRASS
  3. INSULATION MATERIAL : NYLON
  3. NEMA TAB : 4.0 mm ( 0.157 inch )
  4. DESCRIPTION : 2-WAY BULLET RECEPTACLE

Tolerance Unless Otherwise Specified		ANGLE
0 > 6 mm ± 0.20		° REF ±
6 > 18 mm ± 0.30		° ±
18 > 30 mm ± 0.40		° ±
30 > 75 mm ± 0.50		° ±

NAME	MULTI-WAY ADAPTERS	UNIT	
PART NO.	10710	MATERIAL	APPROVE
NUMBER		SCALE SHEET PAGE	CHECKED
DATE	2008/07/24	3/1 1-0 10F1	DRAWN

Morris Products Inc.

A B C D E F G H