
Catalog Number	11516
UPC Number	60198611516
Description	Non-Insulated Fork Spade Terminals 22-16 AWG






Features	
Manufactured from high strength copper alloy	
Electro-tin plated for corrosion resistance	
Wire range stamped on the surface for easy interpretation	
Brazed seam prevents splitting under maximum pressure	
Serrated barrel provides excellent electrical contact and pull-out resistance characteristics at barrel	
General	
Insulation Type	N/A
Material	Copper
Finish	Electro-tin plated
Color	N/A
Wire Range	22-16 AWG
Stud Size	#8
Dimension Information	
L Inches (mm)	0.63
W Inches (mm)	0.319
D Inches (mm)	0.134
d1 Inches (mm)	0.067
d2 Inches (mm)	0.169
E Inches (mm)	0.189
F Inches (mm)	0.256
T Inches (mm)	0.03
Specifications	
Temperature Rating	150°C
Voltage Rating	600 V
Flammability Rating	N/A
Amp Rating	22 AWG 9 Amps
	20 AWG 12 Amps
	18 AWG 17 Amps
	16 AWG 18 Amps
Packaging	
Bag Qty	100
Master Bag Qty	1000
Certifications	
UL	Yes
cUL	Yes
RoHS	Yes

Morris Products 53 Carey Road, Queensbury, NY 12804
www.morrisproducts.com

REV	DESCRIPTION	DATE
1	RDK-96036	2007/12/21
2	RDK-97127	2008/09/19
3	RDK-98020	2009/09/02

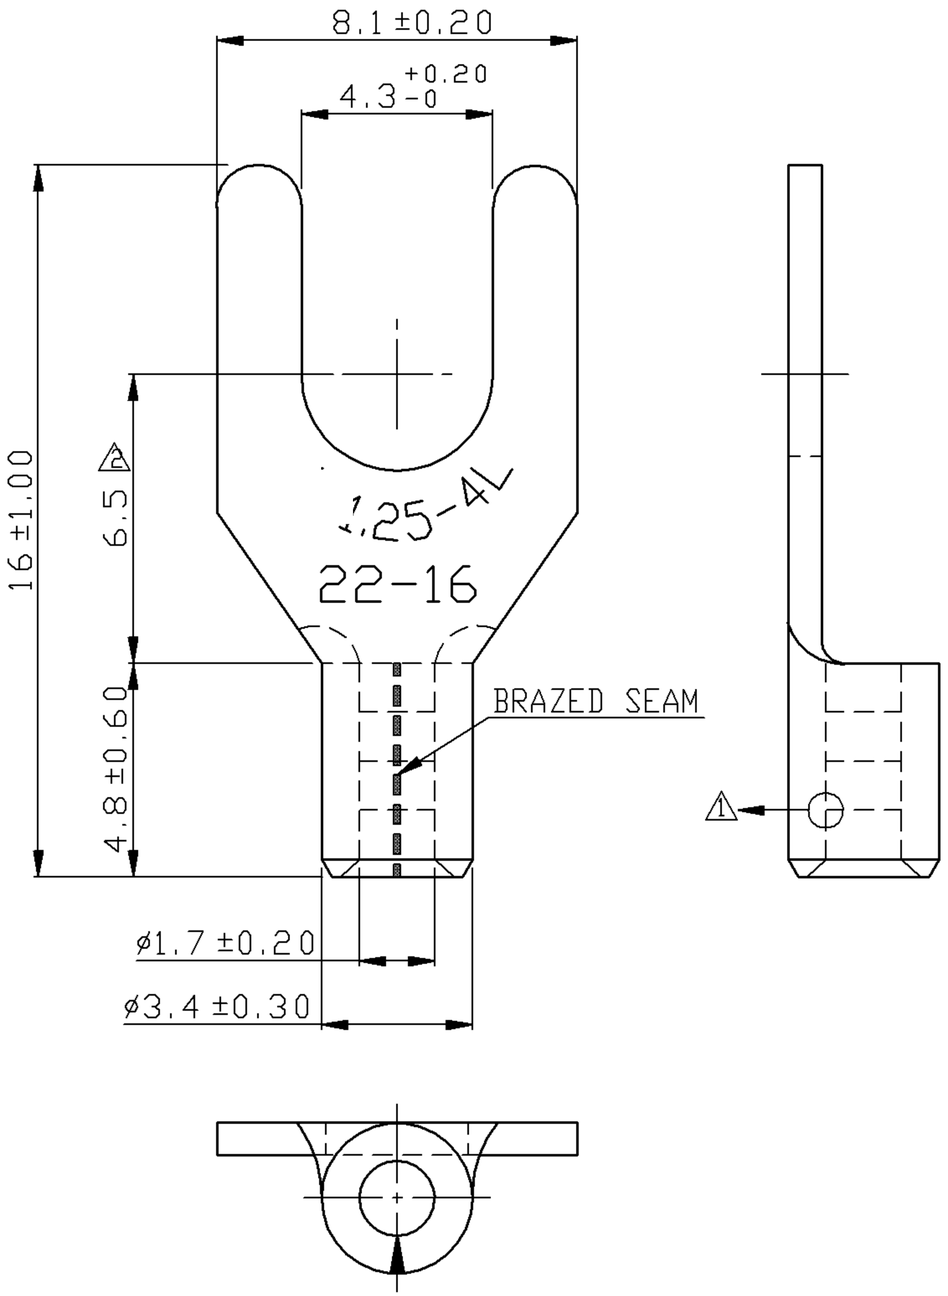

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	9	12	17	18

2. WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm^2)
3. SURFACE TREATMENT : TIN PLATED
4. THICKNESS : 0.75 mm

3 Tolerance Unless Otherwise Specified

0 >	mm ±	ANGLE	
>	mm ±	0°>	° REF ±
>	mm ±	°>	° ±
>	mm ±	°>	° ±

NAME	NON-INSULATED SPADE TERMINALS					UNIT	mm
PART NO.	11516	MATERIAL	COPPER			APPROVE	
NUMBER		SCALE	SHEET	PAGE		CHECKED	
DATE	2007/08/24	5/1	1-3	1OF2		DRAWN	

Morris Products Inc.
53 Carey Rd. Queensbury, NY 12804