




Morris CAT#: 22248-22263
Nylon Cable Glands -
Multi-Conductor -
NPT Thread 3 Hole

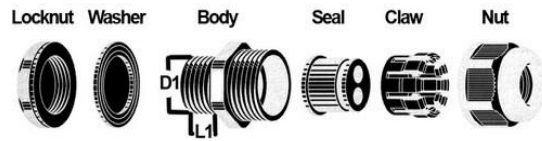

Features:

- Multi-Hole Design organizes multiple cables within a gland
- Seal & Clamp System allows the cord connector to tighten in a circular sequence on the sealing ring to give outstanding strain relief without twisting or damaging the cable
- Simply push the cable through the liquid-tight Nylon strain relief & tighten locknut for quick installation
- Threads into your panel for clearance
- Internal Ratchet with Self-Locking Feature protects against vibrations
- Screw cable glands into NPT Thread (National Pipe Thread)
- Watertight
- 'Collet' design of body accommodates various size cords, cables, tubing, etc.

- Nylon NPT thread cable glands body material is resistant to most common chemicals & solvents
- For best results, use the minimum size that fits into your cable
- Easy to Assemble
- Wide Clamping Range
- No disassembly required
- Made of UL approved NYLON 66
- IP68 Rated Submersible & Dustproof
- UL Recognized
- Flammability Rating: 94V-2
- -22°F to 140°F Temp Rating
- UV Resistant Black
- Locknut Not Included (Sold Separately)

DIMENSIONS = INCHES

CAT. NO.	NPT THREAD	CABLE RANGE	DI	LI	BAG QTY	MASTER BAG
3 HOLE GLAND						
22248	1/4-18	.063 - .102	.52	.31	10	100
22249	3/8-18	.063 - .102	.66	.57	10	100
22250	3/8-18	.118 - .165	.66	.57	10	100
22251	1/2-14	.078 - .118	.83	.51	10	100
22252	1/2-14	.118 - .165	.83	.51	10	100
22253	1/2-14	.138 - .205	.83	.51	10	100
22254	3/4-14	.102 - .142	1.04	.57	10	100
22255	3/4-14	.142 - .205	1.04	.57	10	100
22256	3/4-14	.189 - .244	1.04	.57	10	100
22257	3/4-14	.244 - .315	1.04	.57	10	100
22258	1-11.5	.142 - .205	1.31	.59	10	100
22259	1-11.5	.189 - .244	1.31	.59	10	100
22260	1-11.5	.244 - .315	1.31	.59	10	100
22261	1-11.5	.303 - .394	1.31	.59	10	100
22262	1-1/4-11.5	.256 - .327	1.65	.72	10	100
22263	1-1/4-11.5	.303 - .394	1.65	.72	10	100

www.morrisproducts.com

1-888-777-6678