



|                |                                                          |
|----------------|----------------------------------------------------------|
| Catalog Number | 70140                                                    |
| UPC Number     | 60198670140                                              |
| Description    | Momentary Contact Push Button Switch<br>SPST<br>(ON)-OFF |

#### Features

- Heavy Duty
- Momentary Contact
- Normally Off
- Solid steel/nickel-plated bushings
- 2 Copper Screw Terminals
- ½ in. Diameter mounting hole

#### General

|           |                                                                              |
|-----------|------------------------------------------------------------------------------|
| Material: | Non-metallic Actuator<br>HD Non-Metallic Housing<br>2 Copper Screw Terminals |
|-----------|------------------------------------------------------------------------------|

#### Dimension Information

See Engineering Dwg

#### Specifications

|                       |                                |
|-----------------------|--------------------------------|
| Temperature Rating:   | 0°C - 65°C                     |
| Voltage Rating:       | 125/240 VAC                    |
| Flammability Rating:  | N/A                            |
| Amperage Rating:      | 6 AMP, 125VAC<br>3 AMP, 240VAC |
| InsulationResistance: | 500V DC 100 mohm 1 Minute      |
| Contact Resistant:    | 50 mohm Max                    |
| Dialectric Strength:  | 1500 V AC 1 Minute             |

#### Packaging



|         |    |
|---------|----|
| Bag Qty | 10 |
|---------|----|



#### Certifications

|      |     |
|------|-----|
| UL   | Yes |
| CSA  | Yes |
| ROHS |     |

[www.morrisproducts.com](http://www.morrisproducts.com)

Morris Products 53 Carey Road, Queensbury, NY 12804

|                       |                       |                                                                                    |                                                                                     |
|-----------------------|-----------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Rating                | 6A 120V AC,3A 240V AC | Mounting Hole                                                                      | Circuit Diagram                                                                     |
| Contact Resistance    | 50m ohm Max.          |  |  |
| Insulation Resistance | DC 500V 100M ohm Min. |                                                                                    |                                                                                     |
| Dielectric Strength   | AC 1500V 1 minute     |                                                                                    |                                                                                     |
| Switch Function       | 2P SPST (ON)-OFF      |                                                                                    |                                                                                     |
| BUTTON: BLACK         |                       |                                                                                    |                                                                                     |

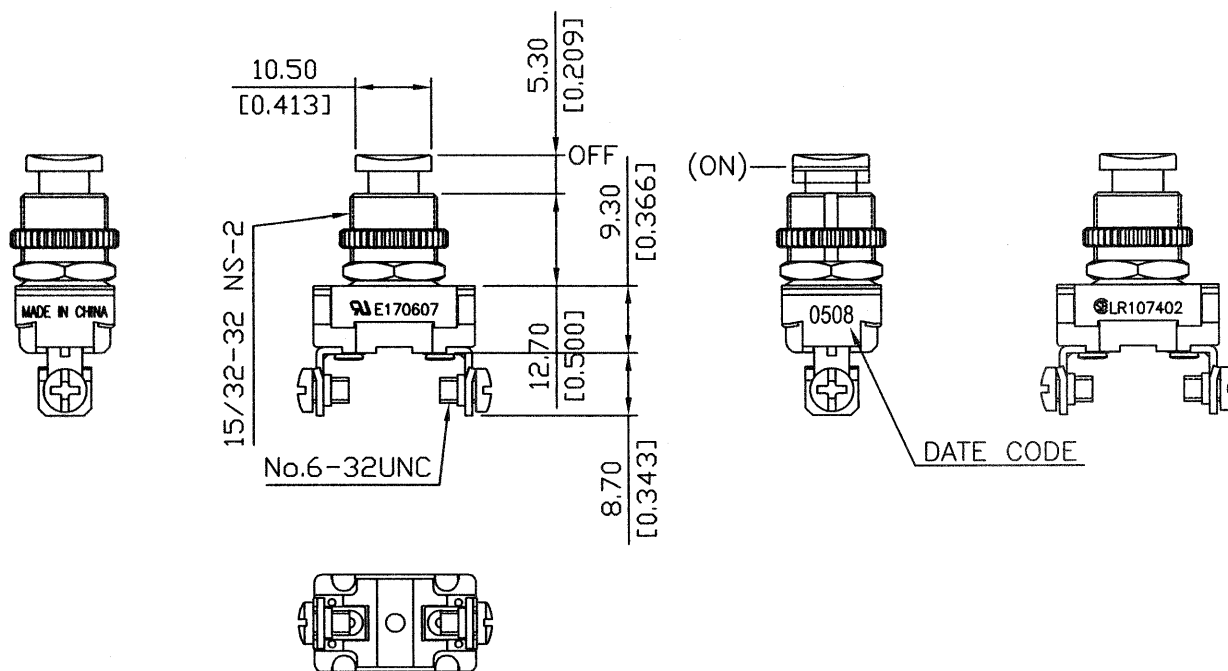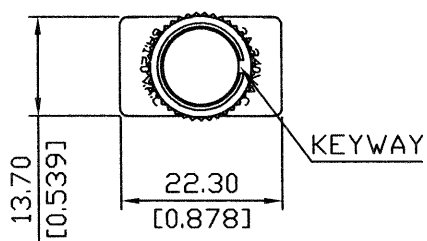

|              |                |                    |                   |                 |                   |             |
|--------------|----------------|--------------------|-------------------|-----------------|-------------------|-------------|
|              |                |                    |                   |                 |                   | △           |
|              |                |                    |                   |                 |                   | △           |
| <b>Date</b>  | <b>Name</b>    | <b>Description</b> |                   |                 |                   | REV. 0 NO   |
| <b>Drawn</b> | <b>Checked</b> | <b>Approved</b>    |                   | Morris Products | <b>Model Name</b> | PUSH SWITCH |
|              |                |                    |                   | Queensbury NY   | <b>Model No.</b>  |             |
| 05/08/'08    | 05/08/'08      | 05/09/'08          | <b>Morris P/N</b> | 70140           | <b>Unit</b>       | mm (inch)   |