



Catalog Number	70180
UPC Number	60198670180
Description	Rocker Switch ON-OFF



Features

- Heavy Duty
- 2 Pole SPST
- Male Quick Connects
- 7/16" X 1" mounting hole
- Red Actuator Rocker Button

General

Material:	Polycarbonate A1Non-metallic Actuator HD Nylon 6/6 Non-Metallic Housing Male Quick Connects
-----------	---

Dimension Information

See Engineering Dwg

Specifications

Temperature Rating:	0°C - 65°C
Voltage Rating:	125/250 VAC
Flammability Rating:	N/A
Amperage Rating:	16 AMP, 125VAC 10 AMP, 250VAC
Motor Load Rating:	1/3HP@16A, 1/2HP@10A
InsulationResistance:	500V DC 100 mohm 1 Minute
Contact Resistant:	50 mohm Max
Dialectric Strength:	1500 V AC 1 Minute

Packaging




Bag Qty	10
---------	----

Certifications

UL	Yes
CSA	Yes
ROHS	


www.morrisproducts.com

Morris Products 53 Carey Road, Queensbury, NY 12804

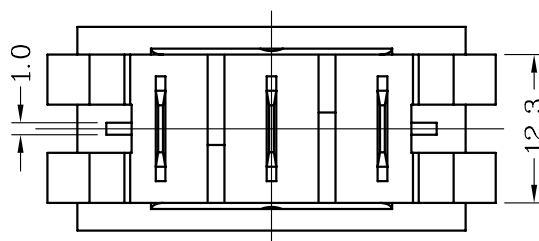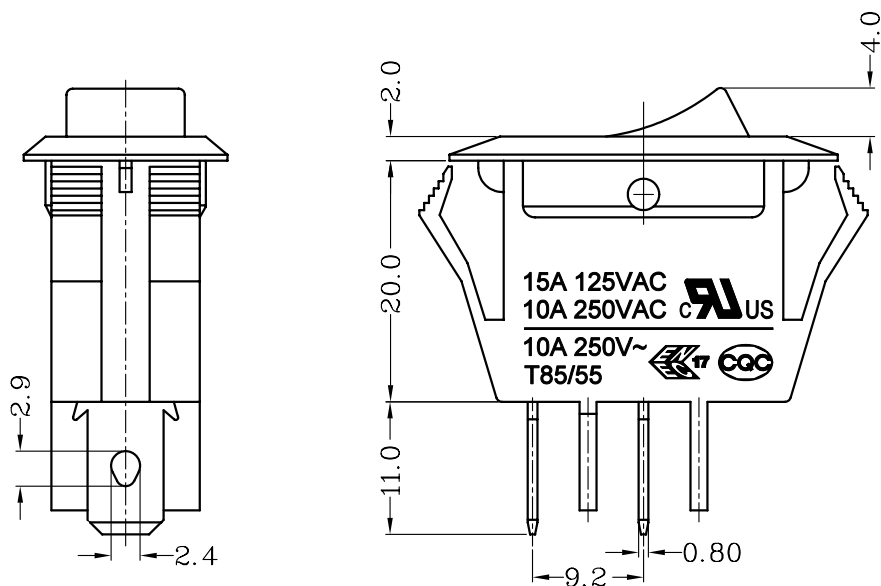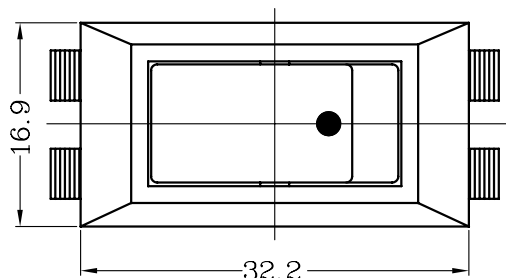



Suggested panel hole size

Panel thickness	X
0.75~3.0	29.0



Circuit diagram

POS. 1	POS. 2
OFF	ON

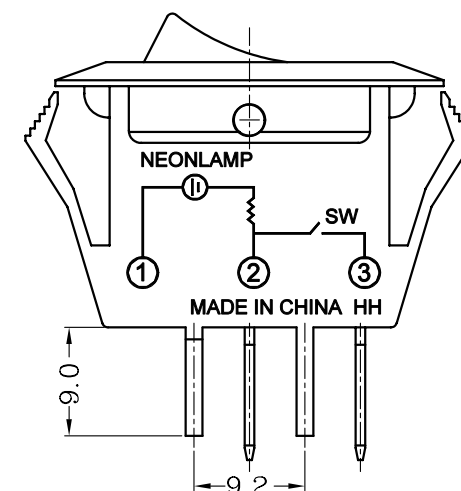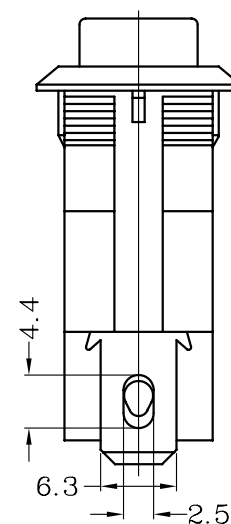

DRN.NO.	TIT.NO.	PAR.NO.	FUN.NO. ON-OFF	MOD.NO. 70180
REV.NO. 01	FINISH	DWN.BY	CHY.BY	APP.BY
UNIT mm	SCALE NOT SCALE	DATE 2012.11.10	DATE	DATE
TOLERANCE UNLESS OTHERWISE SPECIFIED X=±0.50 .X=±0.30 .XX=±0.15 <=±1°				SHEET 1 OF 1
Morris Products Inc. 53 Carey Rd Queensbury NY 12804				