




71151A - DOB SLIM LINE WALL PACK

WHITE 120-277V 15W 5000K

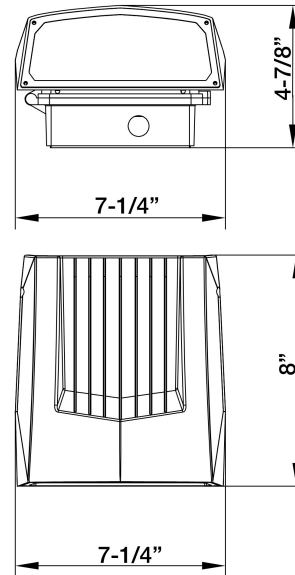


FEATURES:

- Hinged Bracket - 0-90° Angle Tilt Adjustment
- LumiLED LUXEON 3030 LEDs
- Integral Cooling Fin releases the heat efficiently to maintain the life of LEDs & LED driver
- Corrosion resistant Die Cast
- Aluminum housing
- Clear Tempered Glass Lens
- Superior Architectural Powder Coat finish
- Bronze Housing
- Environment: IP65 Wet Location Rated
- ETL, DLC PRODUCT ID#: PEDM28XW
- 5 Year Warranty

Part#	Wattage	Voltage	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	DLC PRODUCT ID#:
71151A	15W	120-277V	2,044	5000K	>70	N/A	103°	136	PEDM28XW

PHOTOMETRY:

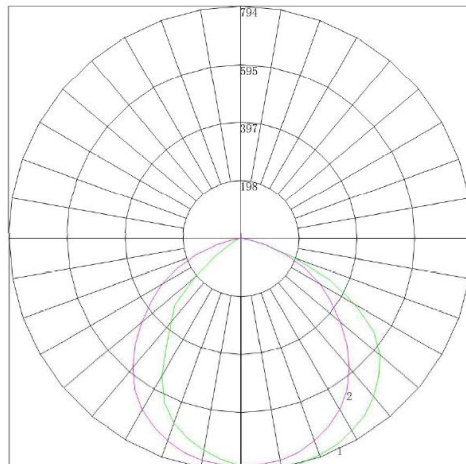



71151A - DOB SLIM LINE WALL PACK

WHITE 120-277V 15W 5000K

TECHNICAL SPECIFICATIONS:

Electrical:

Input Voltage: 120-277V

Current: .12A @ 120V

Frequency: 50/60Hz

Power Factor: ≥ 0.99

THD: $>10\%$

Product Parameters:

15 Watts

Lumens: 2,044

Efficacy: 136 Lumens Per Watt

50,000+ L70 Life Span CCT:

5000K (Cool White)

Chromaticity Measurements:

Beam Angle: 103°

CRI: >70

R9: -29

DUV: -0.0010

Chromaticity (x,y): $x=0.4335$ $y=0.4010$

Chromaticity (u,v): $u=0.2497$ $v=0.3464$

Component Specifications:

LED: LumiLED LUXEON 3030 Driver:

100-277V 50/60Hz

Driver Output Volts: 175V/DC

Driver Output Amps: 2.45A

2.5KV Surge Protection

Dimming:

N/A

Operating Temperature:

Minimum Starting -31°F - 131°F

Construction:

Housing: Die Cast Aluminum Housing

Powder Coated

IP Rating: IP65 Wet Location Rated

Lens Material: PC

Mounting: Wall Mount

Listings:

DLC PRODUCT ID#: PEDM28XW

ETL Listed

Carton Qty: 1

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).