




MORRIS CAT#: 94364-94596

Copper Long Barrel 2 Hole Compression Lugs

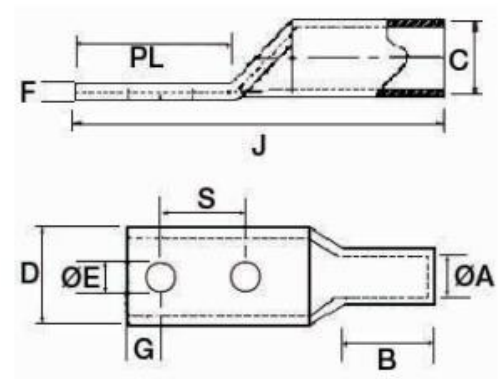

Features:

- High Conductivity Seamless Copper
- Electro-Tin Plating Resists Corrosion, Reduces Contact Resistance for Maximum Conductivity
- Dual Mounting Holes
- Long Barrel Accommodates Multiple Crimps
- Color Coded Die Index and Crimp Marks Printed on Barrel
- UL 486A Listed for Applications Thru 35KV



MORRIS CAT#: 94364-94596

Copper Long Barrel 2 Hole Compression Lugs



DIMENSIONS = INCHES

CAT. NO.	WIRE RANGE	STUD SIZE	HOLE SPACING	COLOR	A	C	J	B	D	F	E	G	PL	S	BOX QTY
94364	4/0 STR.	1/4	3/4	PURPLE	.547	.688	4.09	1.62	1.00	.13	.25	.28	1.25	.75	12
94565	4/0 STR.	5/16	3/4	PURPLE	.547	.688	4.09	1.62	1.00	.13	.33	.28	1.25	.75	12
94566	4/0 STR.	5/16	1	PURPLE	.547	.688	4.09	1.62	1.00	.13	.33	.28	1.25	1.00	12
94366	4/0 STR.	3/8	1	PURPLE	.547	.688	3.54	1.62	1.00	.13	.41	.38	1.81	1.00	12
94367	4/0 STR.	3/8	1-3/4	PURPLE	.547	.688	5.28	1.62	1.00	.13	.41	.38	1.81	1.75	20
94368	4/0 STR.	1/2	1-3/4	PURPLE	.547	.688	5.28	1.62	1.00	.13	.51	.62	2.99	1.75	20
94372	250 MCM	3/8	1	YELLOW	.594	.750	4.17	1.62	1.09	.15	.41	.38	1.81	1.00	12
94374	250 MCM	1/2	1-3/4	YELLOW	.594	.750	5.35	1.62	1.09	.15	.51	.62	2.99	1.75	15
94570	250 MCM	5/8	1-3/4	YELLOW	.594	.750	5.78	1.62	1.09	.15	.67	.62	2.99	1.75	12
94377	300 MCM	3/8	1	WHITE	.658	.813	5.79	2.00	1.19	.15	.41	.38	1.81	1.00	12
94378	300 MCM	1/2	1-3/4	WHITE	.658	.813	5.79	2.00	1.19	.15	.51	.62	2.99	1.75	12
94572	300 MCM	5/8	1-3/4	WHITE	.658	.813	5.79	2.00	1.19	.15	.67	.62	2.99	1.75	12
94575	350 MCM	1/4	3/4	RED	.700	.875	5.83	2.00	1.28	.17	.25	.38	1.81	.75	10
94381	350 MCM	3/8	1	RED	.700	.875	5.83	2.00	1.28	.17	.41	.38	1.81	1.00	10
94382	350 MCM	1/2	1-3/4	RED	.700	.875	5.83	2.00	1.28	.17	.51	.62	2.99	1.75	10
94576	350 MCM	5/8	1-3/4	RED	.700	.875	5.83	2.00	1.28	.17	.67	.62	2.99	1.75	10
94385	400 MCM	3/8	1	BLUE	.764	.949	5.94	2.00	1.39	.18	.41	.38	1.81	1.00	10
94386	400 MCM	1/2	1-3/4	BLUE	.764	.949	5.94	2.00	1.39	.18	.51	.62	2.99	1.75	10
94579	400 MCM	5/8	1-3/4	BLUE	.764	.949	5.94	2.00	1.39	.18	.67	.62	2.99	1.75	10
94582	500 MCM	1/4	3/4	BROWN	.835	1.063	6.22	2.25	1.54	.22	.25	.38	1.81	.75	8
94389	500 MCM	3/8	1	BROWN	.835	1.063	6.22	2.25	1.54	.22	.41	.38	1.81	1.00	8
94390	500 MCM	1/2	1-3/4	BROWN	.835	1.063	6.22	2.25	1.54	.22	.51	.62	2.99	1.75	8
94583	500 MCM	5/8	1-3/4	BROWN	.835	1.063	6.22	2.25	1.54	.22	.67	.62	2.99	1.75	8
94584	500 MCM	3/4	1-3/4	BROWN	.835	1.063	6.22	2.25	1.54	.22	.76	.62	2.99	1.75	8
94393	600 MCM	3/8	1	GREEN	.925	1.188	6.57	2.50	1.72	.25	.41	.38	1.81	1.00	6
94394	600 MCM	1/2	1-3/4	GREEN	.925	1.188	6.57	2.50	1.72	.25	.51	.62	2.99	1.75	6
94585	600 MCM	5/8	1-3/4	GREEN	.925	1.188	6.57	2.50	1.72	.25	.67	.62	2.99	1.75	6
94586	600 MCM	3/4	1-3/4	GREEN	.925	1.188	6.57	2.50	1.72	.25	.76	.62	2.99	1.75	6
94397	750 MCM	3/8	1	BLACK	1.03	1.31	6.93	2.88	1.90	.27	.41	.38	1.81	1.00	4
94398	750 MCM	1/2	1-3/4	BLACK	1.03	1.31	6.93	2.88	1.90	.27	.51	.62	2.99	1.75	4
94590	750 MCM	5/8	1-3/4	BLACK	1.03	1.31	6.93	2.88	1.90	.27	.67	.62	2.99	1.75	4
94591	750 MCM	3/4	1-3/4	BLACK	1.03	1.31	6.93	2.88	1.90	.27	.76	.62	2.99	1.75	4
94592	1000 MCM	3/8	1	WHITE	1.15	1.50	7.125	3.16	2.16	.34	.41	.38	3.06	1	1
94399	1000 MCM	1/2	1-3/4	WHITE	1.15	1.50	7.125	3.16	2.16	.34	.51	.62	3.06	1.75	1
94593	1000 MCM	5/8	1-3/4	WHITE	1.15	1.50	7.125	3.16	2.16	.34	.67	.62	3.06	1.75	1
94594	1000 MCM	3/4	1-3/4	WHITE	1.15	1.50	7.125	3.16	2.16	.34	.76	.62	3.06	1.75	1
94595	1000 MCM	7/8	1-3/4	WHITE	1.15	1.50	7.125	3.16	2.16	.34	.87	.62	3.06	1.75	1
94596	1000 MCM	1	1-3/4	WHITE	1.15	1.50	7.125	3.16	2.16	.34	1.05	.62	3.06	1.75	1