




# MORRIS CAT#: 94702-94746

## Copper Flex Cable Long Barrel

### 2 Hole Compression Lugs

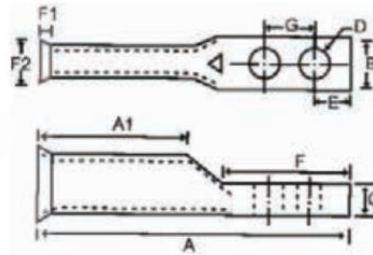

#### Features:

- High Conductivity Seamless Copper
- Electro-Tin Plating Resists Corrosion, Reduces Contact Resistance for Maximum Conductivity
- Flared/Belled Entry for Easy Insertion of Fine Strand Flexible Cable - Class G, H, I, K (Battery), M (Welding), DLO
- Color Coded Die Index and Crimp Marks Printed on Barrel
- UL 486A Listed for Applications Thru 35KV

DIMENSIONS - INCHES

CAT. NO.	WIRE RANGE	STUD SIZE	HOLE SPACE	COLOR CODE	COMM	ASTM CLASS	WELDING CLASS	DLO	A	AI	B	C	D	E	F	G	FI	F2	BOX QTY
94702	8	1/4	5/8	RED	8	10	10	-	2.19	.81	.42	.08	.25	.28	1.26	.63	.12	.32	50
94703	6	1/4	5/8	BLUE	6	8	8	(6)	2.36	.98	.42	.08	.25	.28	1.26	.63	.16	.34	50
94705	6	1/4	3/4	BLUE	6	8	8	(6)	2.80	.98	.42	.08	.25	.28	1.38	.59	.16	.34	50
94706	6	3/8	1	BLUE	6	8	8	(6)	3.24	.98	.42	.08	.41	.38	1.81	1.00	.16	.34	50
94707	6	1/2	1-3/4	BLUE	6	8	8	(6)	4.42	.98	.87	.12	.51	.62	3.00	1.75	.16	.34	50
94708	4	1/4	5/8	GRAY	4	6	6	(105)	2.36	.98	.49	.09	.25	.28	1.26	.63	.16	.42	50
94709	4	1/4	3/4	GRAY	4	6	6	(105)	2.88	.98	.49	.09	.25	.28	1.38	.75	.16	.42	50
94710	4	3/8	1	GRAY	4	6	6	(105)	3.32	.98	.42	.09	.41	.38	1.81	1.00	.16	.42	50
94711	4	1/2	1-3/4	GRAY	4	6	6	(105)	4.09	.98	.87	.12	.51	.62	2.99	1.75	.16	.42	50
94712	2	1/4	5/8	BROWN	2	4	4	(25)	2.52	1.10	.60	.10	.25	.28	1.26	.63	.18	.49	25
94713	2	1/4	3/4	BROWN	2	4	4	(25)	2.64	1.10	.60	.10	.25	.28	1.38	.75	.18	.49	25
94716	2	3/8	1	BROWN	2	4	4	(25)	3.46	1.10	.60	.10	.41	.38	1.81	1.00	.18	.49	25
94717	2	1/2	1-3/4	BROWN	2	4	4	(25)	4.25	1.10	.81	.10	.51	.62	2.99	1.75	.18	.49	25
94718	1	1/4	5/8	GREEN	1	2	2	(150)	2.56	1.10	.67	.11	.25	.28	1.26	.63	.18	.53	25
94719	1	1/4	3/4	GREEN	1	2	2	(150)	3.00	1.10	.67	.11	.25	.28	1.38	.75	.18	.53	25
94721	1	3/8	1	GREEN	1	2	2	(150)	3.46	1.10	.67	.11	.41	.38	1.81	1.00	.18	.53	25
94722	1	1/2	1-3/4	GREEN	1	2	2	(150)	4.29	1.10	.75	.10	.51	.62	2.99	1.75	.18	.53	25
94725	1/0	1/2	1-3/4	PINK	1/0	1	1	(225)	4.63	1.20	.74	.12	.51	.62	2.99	1.75	.18	.56	10
94726	2/0	1/4	3/4	BLACK	2/0	1/0	1/0	1/0(275)	2.99	1.38	.81	.12	.25	.28	1.38	.75	.24	.84	10
94727	2/0	3/8	1	BLACK	2/0	1/0	1/0	1/0(275)	3.43	1.38	.81	.12	.41	.38	1.81	1.00	.24	.84	10
94728	2/0	1/2	1-3/4	BLACK	2/0	1/0	1/0	1/0(275)	4.91	1.38	.81	.12	.51	.62	2.99	1.75	.24	.84	10
94730	3/0	3/8	1	ORANGE	3/0	2/0	-	2/0(325)	3.50	1.38	.90	.13	.41	.38	1.81	1.00	.24	.72	10
94732	3/0	1/2	1-3/4	ORANGE	3/0	2/0	-	2/0(325)	4.65	1.38	.90	.13	.51	.62	2.99	1.75	.24	.72	10
94733	4/0	3/8	1	PURPLE	4/0	3/0	2/0	3/0(450)	3.54	1.42	1.00	.13	.41	.38	1.81	1.00	.26	.77	10
94734	4/0	1/2	1-3/4	PURPLE	4/0	3/0	2/0	3/0(450)	4.72	1.42	1.00	.13	.51	.62	2.99	1.75	.26	.77	10
94735	250	3/8	1	YELLOW	250	-	3/0	4/0(550)	3.78	1.81	1.09	.15	.41	.38	1.81	1.00	.26	.84	10
94736	250	1/2	1-3/4	YELLOW	250	-	3/0	4/0(550)	4.96	1.81	1.09	.15	.51	.62	2.99	1.75	.26	.84	10
94737	300	1/2	1-3/4	WHITE	300	4/0	4/0	262.6	5.31	1.97	1.19	.15	.51	.62	2.99	1.75	.31	.94	10
94738	350	3/8	1	RED	350	250	250	313.1	4.60	1.97	1.28	.17	.41	.38	1.81	1.00	.33	1.02	10
94739	350	1/2	1-3/4	RED	350	250	250	313.1	5.39	1.97	1.28	.17	.51	.62	2.99	1.75	.33	1.02	10
94740	400	1/2	1-3/4	BLUE	400	300	300	350	5.47	1.97	1.39	.18	.51	.62	2.99	1.75	.33	1.08	10
94741	500	3/8	1	BROWN	500	350	350	373.3	5.04	2.24	1.54	.22	.41	.38	1.81	1.00	.35	1.20	10
94742	500	1/2	1-3/4	BROWN	500	350	350	373.3	5.75	2.24	1.54	.22	.51	.62	2.99	1.75	.35	1.20	10
94744	600	1/2	1-3/4	GREEN	600	400	400	444.4	5.79	2.24	1.72	.25	.51	.62	2.99	1.75	.39	1.34	6
94746	750	1/2	1-3/4	BLACK	750	600	500	-	6.30	2.64	1.90	.27	.51	.62	2.99	1.75	.43	1.47	3