722S | 722S-TBM

SFIC: Sliding Door Plunger Lock

BEST compatible interchangeable core cylinders

SPECIFICATIONS

Retrofits: Best 2S, 2S-TBM
Standard function: Key removable in locked and unlocked position.
Key-retaining function: Key removable in locked position only. Specify ***-KR*** for key-retaining.
TBM function: Specify TBM for "through-bolt mounting"
Body: Solid brass
Barrel length: 1-3/4"
Bolt throw: 1/2"
Max. door thickness: 1-7/8"
Min. door thickness (TBM): 5/8"
Finish: 26D
Packaged: Packed 10 per box

KEYING INFORMATION

Cores: Not included
Accepts: Best, Arrow, Falcon, KSP, Schlage SFIC or equivalent small format interchangeable cores
Compatible electronic cylinders: Medeco Nexgen XT or VIDEX CyberLock SFIC cylinders

INCLUDED ACCESSORIES

725-1 spacer to fit 6 or 7 pin cores
Matching strike
725-PA plastic thumbturn
TBM locks include through-bolt plates and screws

OPTIONAL ACCESSORIES

SFIC cores: 206/207 Series



722S

Function: Sliding door plunger lock for bypassing sliding doors
Material: Fits up to 1-3/4" material
Standard function: Key removable in locked or unlocked position. Standard locks are non-handed.
Key-retaining function: Key removable in locked position only. Specify *-KR* for key-retaining.



722S-TBM

Function: Sliding door plunger lock for bypassing sliding doors. Includes with through-bolt mounting hardware.
Material: Fits up to 1-3/4" material
Standard function: Key removable in locked or unlocked position. Standard locks are non-handed.
Key-retaining function: Key removable in locked position only. Specify *-KR* for key-retaining.

WARNING: This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

OLYMPUS® LOCK INC

722S | 722S-TBM

SFIC: Sliding Door Plunger Lock

OPTIONAL ACCESSORIES - *See our website for a complete list of optional components.*

206/207 Series

- 206 Series 6-pin SFIC cylinder
- 207 Series 7-pin SFIC cylinder




BEST compatible interchangeable core cylinders




AVAILABLE KEYWAYS

A	B	C	D	E	F	G	H	
J	K	L	M	Q	1C	1D	KMT300	




722S-TBM Locked

Through-bolt mount




722S-TBM Unlocked

Through-bolt mount





722S Locked



722S Unlocked

DIMENSIONS

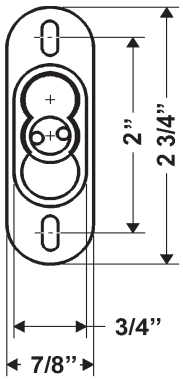

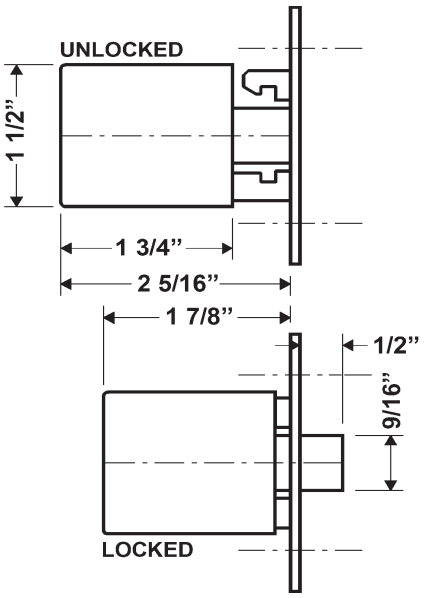

© 2020 Olympus Lock, Inc.

OLYMPUS® LOCK INC