


Brand	Root
	THT17SLC...

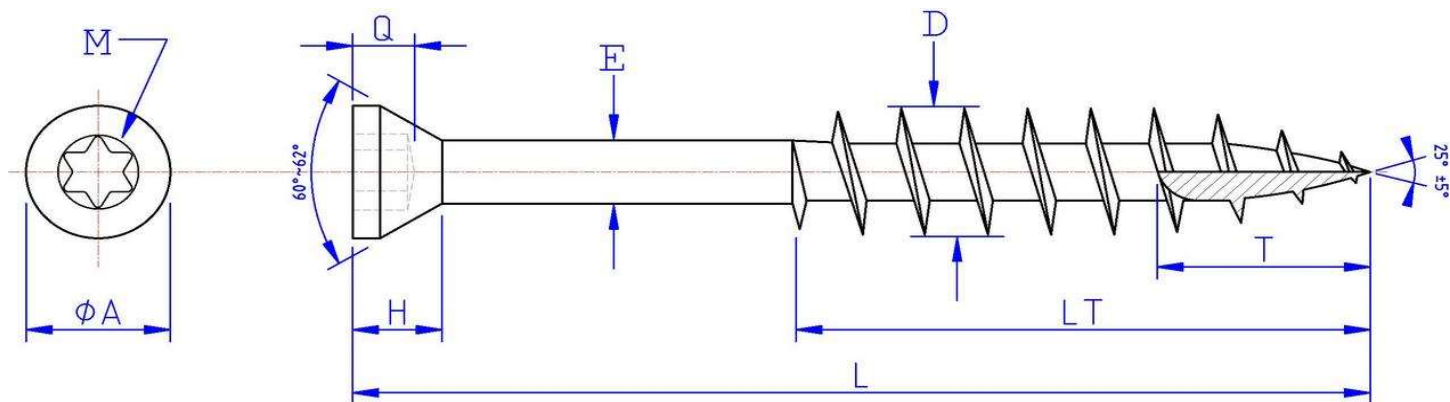

unit : INCH

L LENGTH TOLERANCE	> 5/8" to ≤ 1-1/2"	+ 0	- 0.05
	> 1-1/2" to ≤ 2-3/4"	+ 0	- 0.06

LT THREAD LENGTH	Half Threaded
-------------------------------	--------------------------

SCREW SIZE	M PUNCH		Q Drive Depth	A Head Diam.	H Head Height	E Body Diam.	D Thread Diam.	T Point Length	THREAD Per Inch	Min. Torsional Strength Lb/Inch
# 7	T-20	Min	0.050	0.215	Ref.	0.112	0.155	0.300	11	
		Max	0.065	0.237	0.140	0.117	0.166	0.375		

Trim Head, Torx drive **Type VI**, Wood Screw Coarse Thread, **Type-17**
Stainless Steel (series 316L) Passivated

Root= Trim Head Torx type 17 Stainless Low Carbon

Bulk Label Description:

<u>English:</u>	TRIM HEAD, TORX DRIVE, DECK SCREW COARSE THREAD, TYPE-17, STAINLESS STEEL
<u>French:</u>	VIS À PATIO TÊTE DE FINITION, TORX, GROS FILET, TYPE-17, ACIER INOXYDABLE
<u>Spanish:</u>	TORNILLO DE CABEZA RECORTADA, TORX, ROSCA GRUESA, TIPO 17, ACERO INOXIDABLE

Date : 20 mai 2025

Done by : **P.B**