


Brand	Root
	TT17SLC... TTS LC...

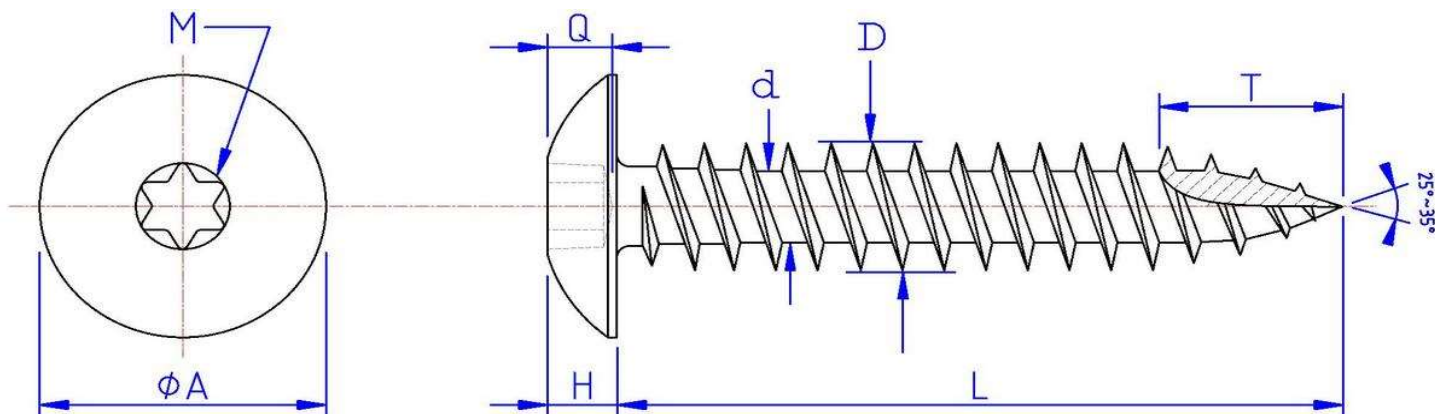

unit: INCH

L LENGTH TOLERANCE	≤ 5/8"	+ 0	- 0.03
	> 5/8" to ≤ 1-1/2"	+ 0	- 0.05

THREAD LENGTH	Full Thread
--------------------------	--------------------

SCREW SIZE	M PUNCH		Q DRIVE DEPTH	A HEAD DIAM.	H HEAD HEIGHT	D THREAD DIAM.	d MINOR DIAM.	T POINT LENGTH	THREAD PER INCH	Min. Torsional Strength Lb/inch
# 6	T-15	Min	0.045	0.303	0.074	0.136	0.096	0.290	18	
		Max	0.055	0.321	0.086	0.141	0.102	0.350		
# 8	T-20	Min	0.055	0.364	0.088	0.162	0.116	0.290	15	
		Max	0.071	0.384	0.102	0.168	0.123	0.350		

Truss Head, Torx drive Type VI, Wood screw Single Lead, Type-17
Stainless Steel (series 316L) Passivated

Root= Truss Torx type 17 Stainless Low Carbon
 Root= Truss Torx Stainless Low Carbon

Bulk Label Description:

English: TRUSS HEAD, TORX, WOOD SCREW, TYPE-17, STAINLESS STEEL
French: VIS À BOIS TYPE-17, TÊTE TRUSS, TORX, ACIER INOXYDABLE
Spanish: TORNILLO PARA MADERA, TYPO 17, CABEZA TRUSS, TORX, ACERO INOXIDABLE

Date : 20 mai 2025

Done by : **P.B.**