MODEL 1200WP SPECIFICATIONS


ELECTRICAL SPECIFICATIONS


Supply Voltage:	12 or 24 VDC
Current Draw:	440 mA @ 12VDC
	260 mA @ 24 VDC

MECHANICAL SPECIFICATIONS

Magnet Size:	9”L x 2-5/8”H x 1-5/8”W
Armature Size:	7-1/2”L x 2-3/8”H x 9/16”W
Holding Force:	1200 Pounds
Housing:	Stainless Steel
Conduit Fitting:	Internal thread 1/2”, External thread 3/4”

WIRING DIAGRAM

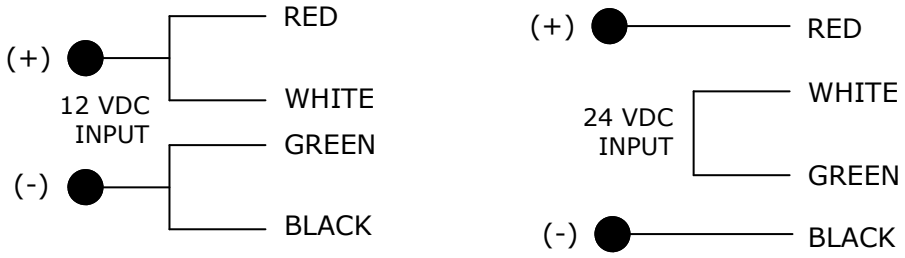

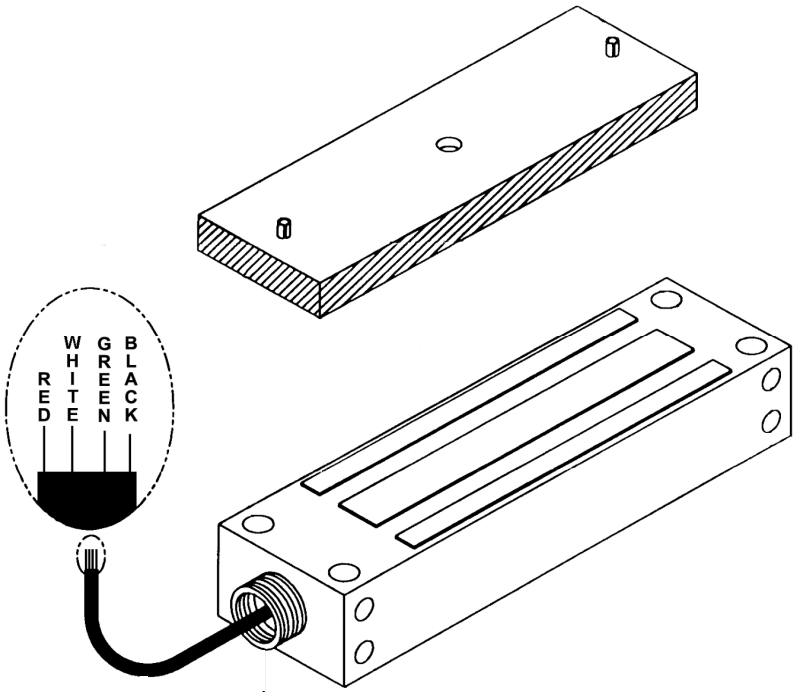

ALARM CONTROLS
ASSA ABLOY


Alarm Controls Corporation
Deer Park, New York 11729
(800) 645-5538
www.alarmcontrols.com

ASSA ABLOY, the global leader
in door opening solutions

GATE LOCK INSTALLATION EXAMPLES

USE AM3370 BRACKET FOR MODEL 600WP
USE AM6370 BRACKET FOR MODEL 1200WP
CONSULT FACTORY FOR CUSTOM BRACKETS


TYPICAL SLIDING GATE INSTALLATION

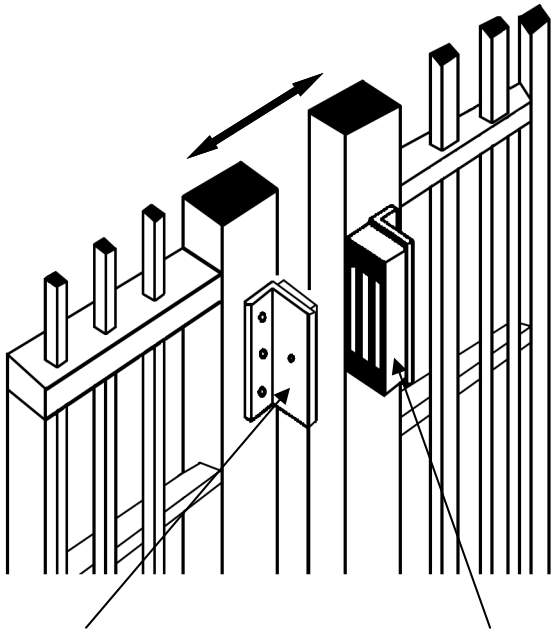

ANGLE BRACKET ATTACHES ARMATURE TO MOVING SECTION OF GATE

ANGLE BRACKET ATTACHES MAGNET TO STATIONARY SECTION OF GATE

TYPICAL SWINGING GATE INSTALLATION

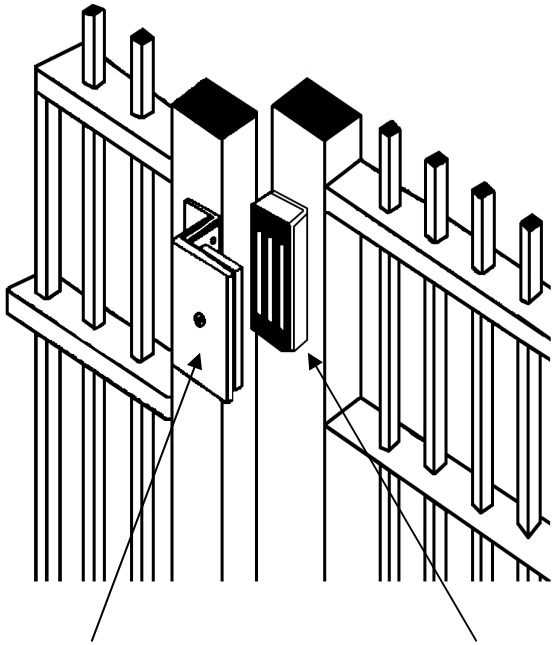

ADJUSTABLE Z BRACKET ATTACHES ARMATURE TO MOVING SECTION OF GATE

MAGNET MOUNTS ON STATIONARY SECTION OF GATE

ALARM CONTROLS
ASSA ABLOY

Alarm Controls Corporation
19 Brandywine Drive
Deer Park, New York 11729
(800) 645-5538
www.alarmcontrols.com

ASSA ABLOY, the global leader in door opening solutions