


AL500 Series Alarmed Hardware

Premier Product

AL500 Series exit alarm

Features:

- Microprocessor based alarm board
- When armed, alarm sounds immediately upon rail depression
- All exit devices have tamper resistant latching (Guarded Latch)
- Battery powered - 9VDC
- 103 Db @ 8 ft pulsating horn
- Flashing red LED provides visible violation indication, reset by key only
- Low battery alert
- Field selectable continuous alarm option
- Automatic re-arming option
- Inside cylinder operation to arm or disarm unit uses a 1-1/8" (29mm) mortise cylinder with 001 cam. Cylinder ordered separately.
- UL Listed and cUL Listed
- UL Listed to Canadian Safety Standards
- Rail Monitoring and Guarded Latch are standard internal features
- Minimum door widths: E 32" only, F 32-1/4 - 36", G 36-1/4 - 48"
- See McKinney's Transfer Device Solutions Catalog for QC Hinge and cable requirements (if hard wired)

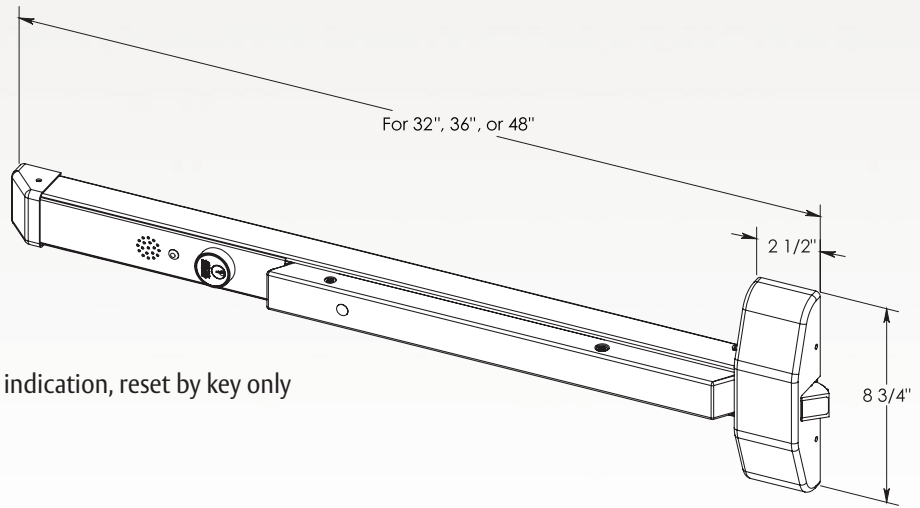

Finishes:

630, 689, 690, BSP, RD

Certification and Compliance:

Designed to meet ANSI 156.3-1984 and A117.1-1980 for Accessibility Standards.

Packed - 1 each.

AL500 Series Alarmed Hardware

Premier Product

AL500 Series trim

Exit Alarm Trim

Matching trim available to complement other series of cylindrical locks, BM Series Mortise locks, exit devices and alarms.

Ordering information:





When ordering trim, specify design symbol and function, eg: **SRX82**, if specifying **Sierra** lever in **Storeroom** function.

Finishes

Knob: US3, US4, US10, US10B, US26D

Lever: 26D, 613E

Pull: 689, 690, RD

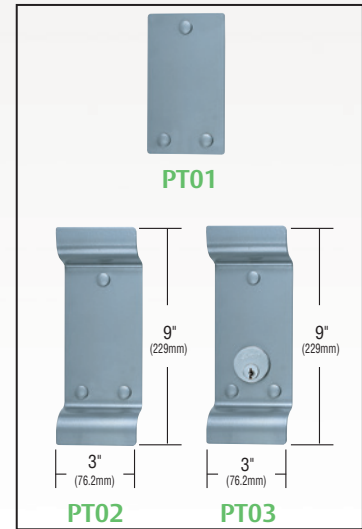

AL500 Series accessories

Functions

01 Passage – Knob always active. Turning knob retracts latch and puts alarm into 15 second delay mode. (Latch retraction by knob sets off alarm is optional).

12/82 Storeroom – Knob/lever always rigid. Key retracts latch and puts alarm into 15 second delay mode.

17/87 Classroom – Key locks or unlocks knob/lever.

Turning knob retracts latch and puts alarm into 15 second delay mode.

Thru Bolts

#F554 Specify finish: 26D, 10B, BSP

Options:

Automatic Rearming

- Units are provided with spring loaded on/off switch. Switch automatically returns to the on position after removal of the key.
- Alarm can never be left off.

Continuous Alarm

- Horns will sound continuously after a violation has occurred—does not shut off after 2 minute alarm cycle.
- Only disarming by key operation will quiet the alarm.
- Remote power is recommended for units with this feature.

Strikes:

