AIPHONE®

GT-1A

Audio Only Tenant Station



DESCRIPTION:

The GT-1A is an audio only tenant station for the GT series Multi-Unit entry system. It is equipped with a Talk, Door Release, and optional Service Button.

When a visitor calls, the tenant station rings and is answered by one touch of the Talk button. The GT-1A also has the capability of calling the Concierge/Security Guard station(s), turning on a light while speaking with a visitor at the entrance, receiving an emergency tone from a pull cord or panic call button, and releasing a door.

The GT-1A is designed to be surface mounted, and has a slim streamlined design. Up to four GT-1A units can be used in the same tenant location.

Communication is hands-free at the entrance station when a tenant answers the call, and is either VOX hands-free or push-to-talk at the tenant station when speaking with the visitor.


GT-1A FEATURES:


- Hands free audio communication
- Door release to the door where communication is established
- Call to Security Guard / Concierge station
- Optional individual doorbell rings unique tone, notifying resident that someone is at their door
- Optional activation of outside light while talking to entrance station
- Optional connection of panic call station (GFK-PS), alerting with tone and call to Concierge
- Separate volume controls for call tone and communication
- Simply 2-conductor common bus wiring
- Surface mounts to a wall on 1-gang box or ring
- ABS plastic construction

Aiphone Corporation
1700 130th AVE NE * Bellevue, WA 98005
Ph: (800) 692-0200 * Fax: (425) 455-0071
tech@aiphone.com

GT-1A
Audio Only Tenant Station

FEATURE CALL-OUT:

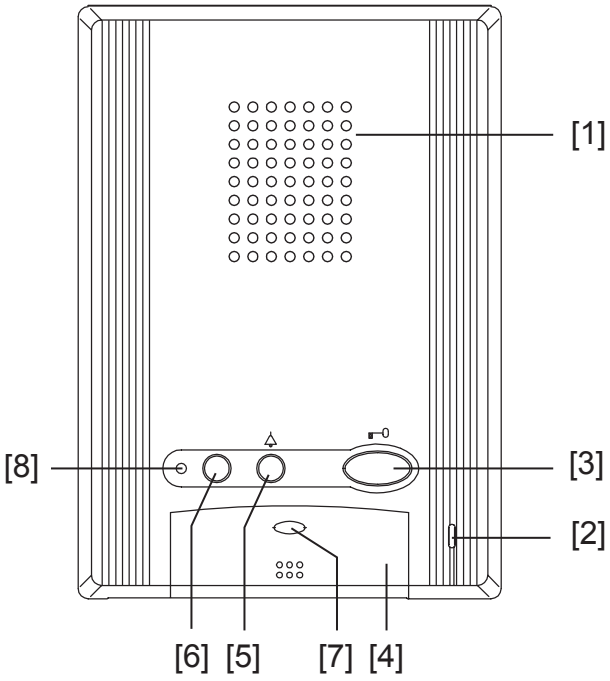

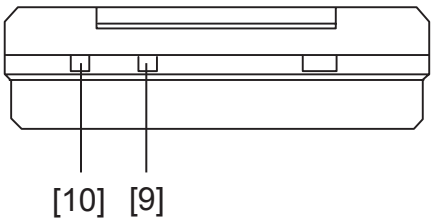

FEATURE CALL-OUT DEFINITIONS:

[1] Speaker

[2] Microphone

[3] Door release button

[4] Talk button

[5] Light button / Security guard station call button

[6] Service button (option)

[7] Talk LED

[8] Call tone off LED

[9] Receive volume control

[10] Call tone volume control

SPECIFICATIONS:

Power Source:	24V DC, supplied from GT-BC
Call:	Varying ring tones from entrance panel, concierge, or doorbell
Communication:	Hands-free or Press-to-talk
Capacity:	Max. 4 tenant stations per resident location
Wiring:	2-conductor, PE insulated, common bus
Mounting:	Wall mount
Temperature:	32-104°F (0-40°C)
Dimensions:	6-7/8” H x 4-15/16” W x 1-¼” D
Weight:	Approx. 0.70 lbs (330g)

Aiphone Corporation
1700 130th AVE NE * Bellevue, WA 98005
Ph: (800) 692-0200 * Fax: (425) 455-0071
tech@aiphone.com