

Shown with 501 Option

The 5000 Series is also available in a **Complete One Box Solution**

5000 Series

The **grade 1, low profile** solution for **cylindrical** locksets

The 5000 series is a compact, high performance electric strike designed for low profile openings where there is limited space behind the jamb. Its strength is derived from a unique keeper pin locking design, enabling the 5000 to exceed the ratings of the frame, door and locking hardware. This field selectable fail secure/fail safe unit is easy to install and accommodates latchbolts up to 5/8" throw.

Specifications

- UL 1034, burglary-resistant listed and suitable for outdoor use
- UL 294 (6th Edition) listed
- ANSI/BHMA A156.31, Grade 1
- MEA New York City accepted
- RoHS compliant
- Patent: 5,934,720

Frame Application

- Metal
- Wood

Electrical

- .24 Amps @ 12VDC/VAC
- .12 Amps @ 24VDC/VAC
- DC continuous duty/ AC intermittent duty only
- PoE friendly



5000 Models

5000
Universal electric strike
Faceplate options ordered separately, see page 28

5000C
Complete electric strike
Includes the 501 and 501A faceplates in the box



Model 5000C includes a 501 and a 501A faceplate in the box

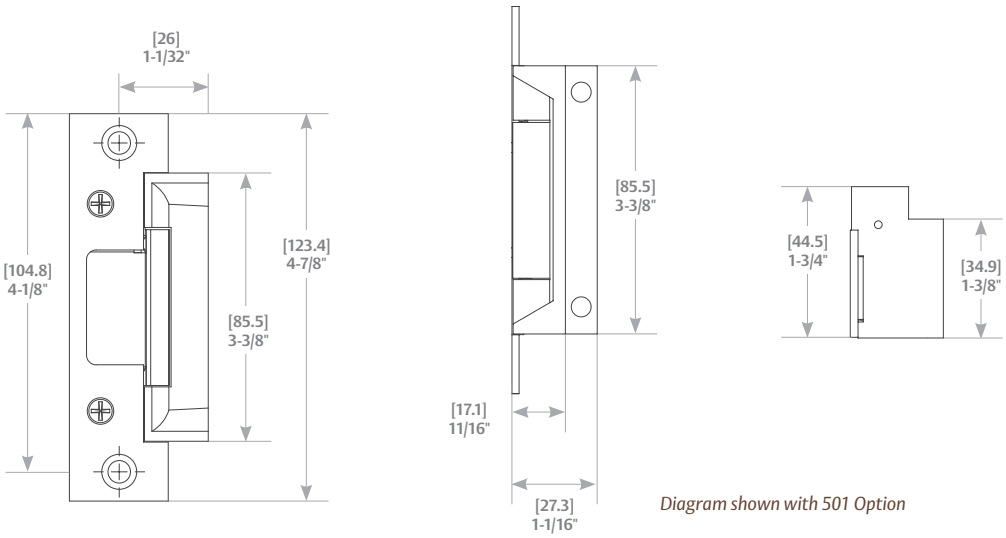


Diagram shown with 501 Option

Standard Features

- Tamper resistant
- Static strength 1,500 lbs.
- Dynamic strength 70 ft-lbs.
- Endurance 500,000 cycles
- Field selectable fail secure/fail safe
- Dual voltage 12 or 24 VDC/VAC
- Non-handed
- Internally mounted solenoid
- Accommodates 1/2" - 5/8" latchbolt (5/8" with 1/8" door gap)
- Strike body depth 1-1/16"
- Plug-in connector
- Trim enhancer included
- Five-year limited warranty

Optional Features

- **LBM** » Latchbolt monitor

Accessories

150 » Strike latch guard

154-MTK » Metal template kit

2001M » Plug-in bridge rectifier

2004M » ElectroLynx® adapter

2005M3 » SMART Pac® III

2006M » Plug-in buzzer

5104-1/2 » 1/2" stackable lip extension

5104-1 » 1" stackable lip extension

5104-1-1/4 » 1-1/4" stackable lip extension

Finishes

630 » Satin stainless steel

605 » Bright brass

606 » Satin brass

612 » Satin bronze


613 » Bronze toned

629 » Bright stainless steel

BLK » Black

**Complete Pacs are only available in the 630 finish*

"Press Fit" Stackable Lip Extensions



a » 5104-1/2
1/2" stackable lip extension

b » 5104-1
1" stackable lip extension

c » 5104-1-1/4
1-1/4" stackable lip extension

CYLINDRICAL LOCKSETS
SPECIALTY LOCKSETS
FIELD SELECTABLE (12 OR 24VDC)
FIELD SELECTABLE (FAIL SECURE / FAIL SAFE)
GRADE 1
OUTDOOR RATED
UL 1034 BURGLARY LISTED

hes
ASSA ABLOY

© 2015, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company.

5000/5200 Series Faceplate Options

SPECIALTY

***Operation**: After releasing the latchbolt, the keeper returns to the locked position*



4-7/8" x 1-1/4"

Square corners and flat faceplate

501 Option

For use with: Cylindrical locksets in ANSI metal jambs

» **ANSI/BHMA Numbers:** E09321, E09322, E09323





4-7/8" x 1-1/4"

Radius corners and flat faceplate

501A Option

For use with: Cylindrical locksets or spring latches in aluminum frames. Includes universal mounting tabs.

» **ANSI/BHMA Numbers:** E09321, E09322, E09323







7-15/16" x 1-7/16"

Radius corners and flat faceplate

502 Option

For use with: Cylindrical locksets or spring latches in aluminum frames. Includes universal mounting tabs.

» **ANSI/BHMA Numbers:** E09321, E09322, E09323







6-7/8" x 1-1/4"

Radius corners and flat faceplate

503 Option

For use with: Cylindrical locksets or spring latches in aluminum frames. Includes universal mounting tabs.

» **ANSI/BHMA Numbers:** E09321, E09322, E09323







10" x 1-3/8"

Radius corners and flat faceplate

504 Option

For use with: Cylindrical locksets. Four-point mounting for wood installations

» **ANSI/BHMA Numbers:** E09321, E09322, E09323

