



ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.
Rixson® is a registered trademark of Yale Security Inc., an ASSA ABLOY Group company. Copyright© 2004, 2009, Yale Security Inc., an ASSA ABLOY Group company.
All rights reserved. Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.

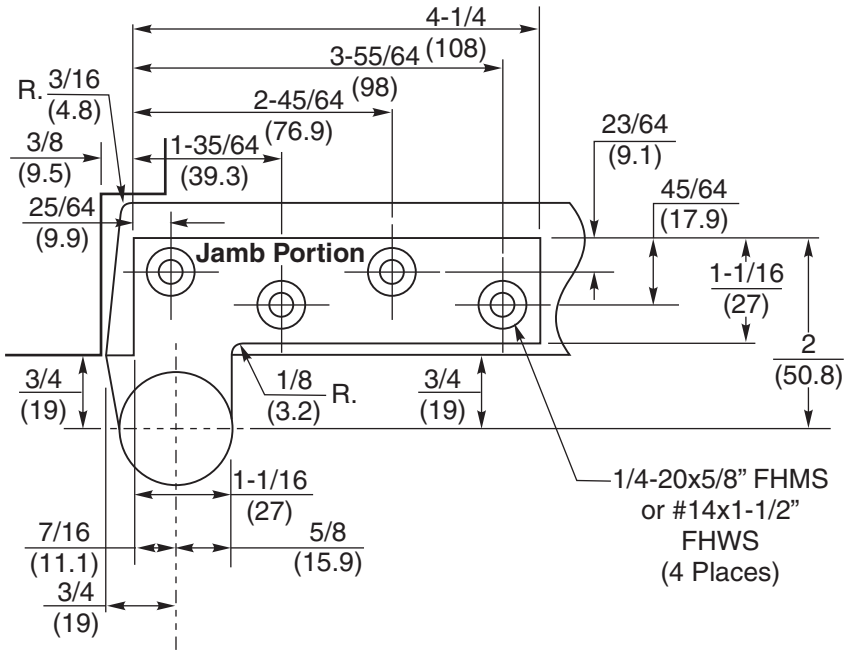

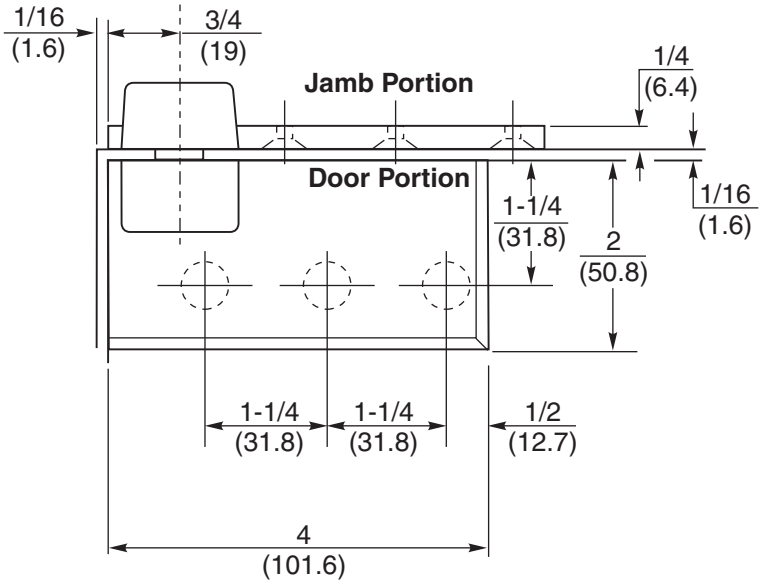

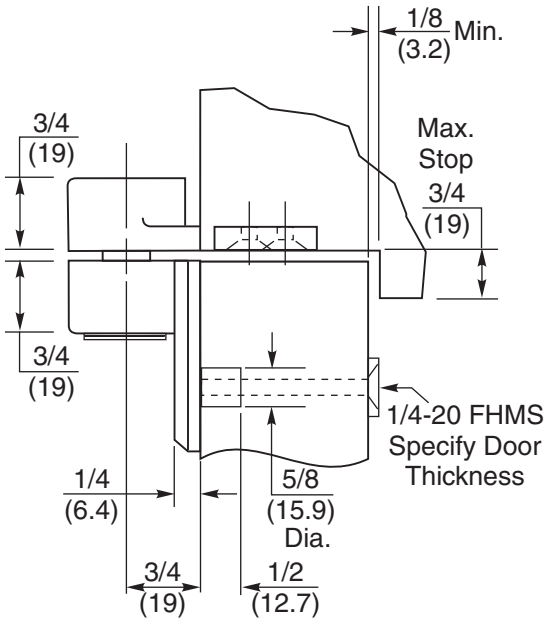

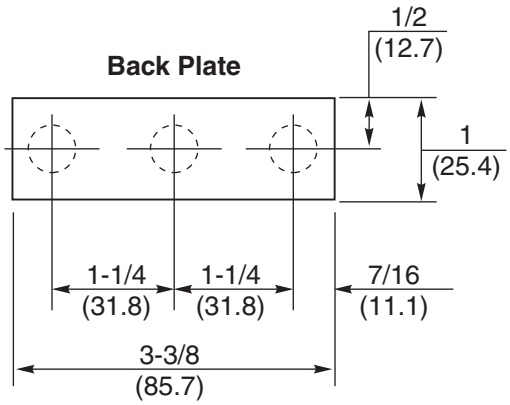

Notes:
1. Do not scale drawing.
2. Dimensions are given in inches (mm).
3. Right Hand shown.
4. Template drawing for reference only.

280 Top Pivot
3/4" Offset
Half Surface


RIXSON
ASSA ABLOY
www.rixson.com

TEMPLATE NUMBER	DATE
IS-280	07-09

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.
Rixson® is a registered trademark of Yale Security Inc., an ASSA ABLOY Group company. Copyright© 2004, 2009, Yale Security Inc., an ASSA ABLOY Group company.
All rights reserved. Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.


280 Top Pivot

1

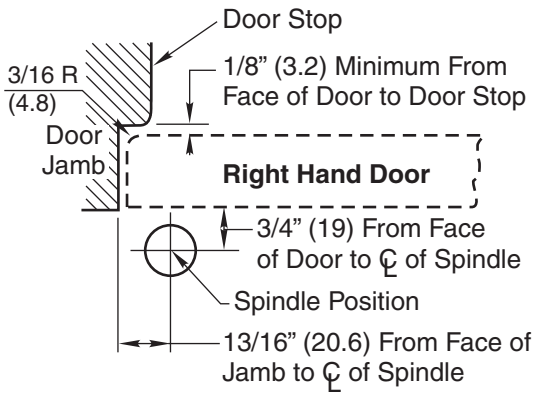


1. Install Pivot

A. Measure 13/16" (20.6) out from door jamb.
B. Allow 1/8" (3.2) min. clearance from door stop to door face. Measure door thickness. Add 3/4" (19).
C. Where lines meet determines center line of closer/bottom pivot.
D. Install top pivot in door per template.
E. Install top pivot in frame per template.

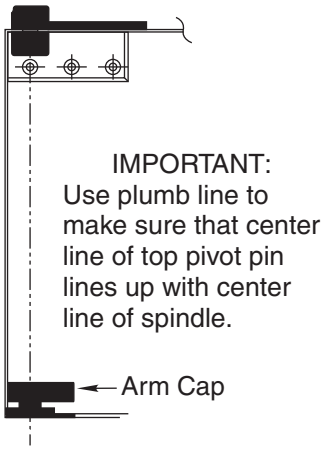


2

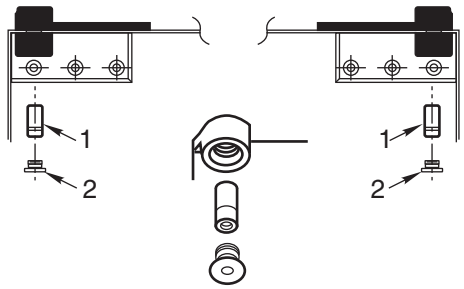

2. Hang Door

A. Set door on bottom pivot/closer spindle.
B. Push Item 1 "top pivot pin" into place. Attach "cap" Item 2. CAP MUST BE TIGHTENED SECURELY

How To Determine Hand of Door



Face a door swinging open away from you. If it opens to the right, it is right hand. If it opens to the left, it is left hand.

280 Top Pivot
3/4" Offset
Half Surface

RIXSON
ASSA ABLOY
www.rixson.com

TEMPLATE NUMBER	DATE
IS-280	07-09