

Securitron Magnalock Corp.
550 Vista Boulevard
Sparks, NV 89434

Tel 775.355.5625
Fax 775.355.5633
info@securitron.com
www.securitron.com

ASSA ABLOY, the global leader in door opening solutions

SEPT ELECTRICAL POWER TRANSFER INSTALLATION INSTRUCTIONS

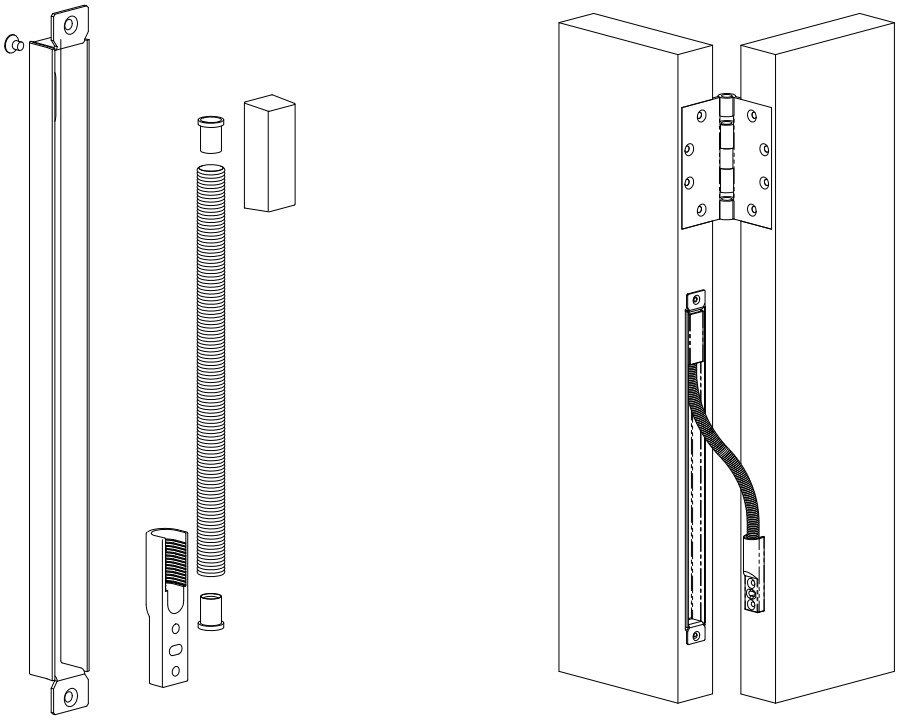

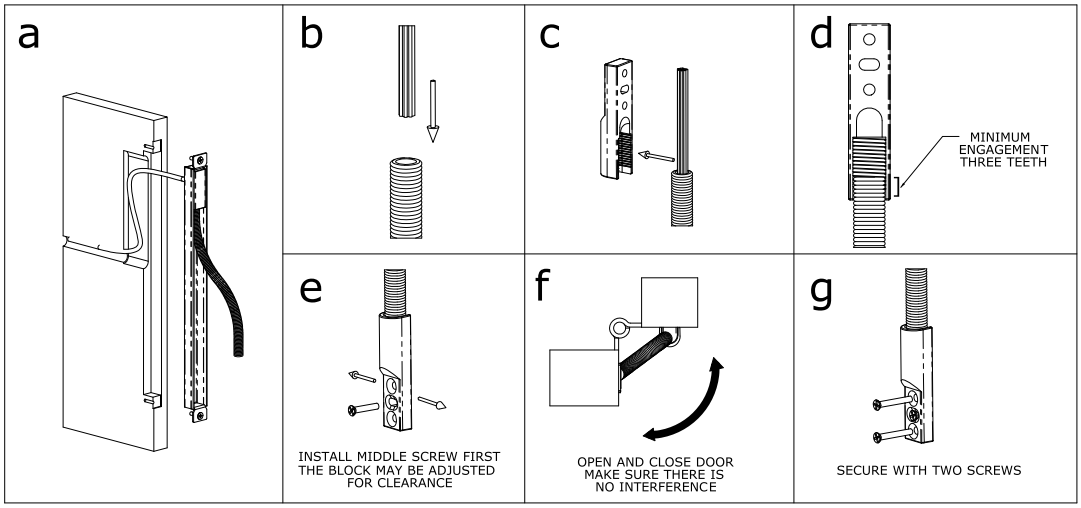


Electrical

The following chart shows the electrical specifications for each SEPT model.

MODEL	TYPE	WIRE SIZE/QTY	CURRENT LIMIT (Per Wire)
SEPT	No wires furnished	22 AWG min./user defined	Max. 1A
SEPT-10	10 Wire (2+8)	18 AWG/2	Max. 5A
		22 AWG/8	Max. 1A
EL-SEPT	ElectroLynx® (8+4)	22 AWG/12	Max. 1A
SEPT-C5E	CAT 5e (8+1)	24 AWG/8	Max. 1A
		22 AWG/1	Ground (Max. 1A)

© Copyright, 2011, all rights reserved

PN# 500-SEPT
Rev. D, 02/11

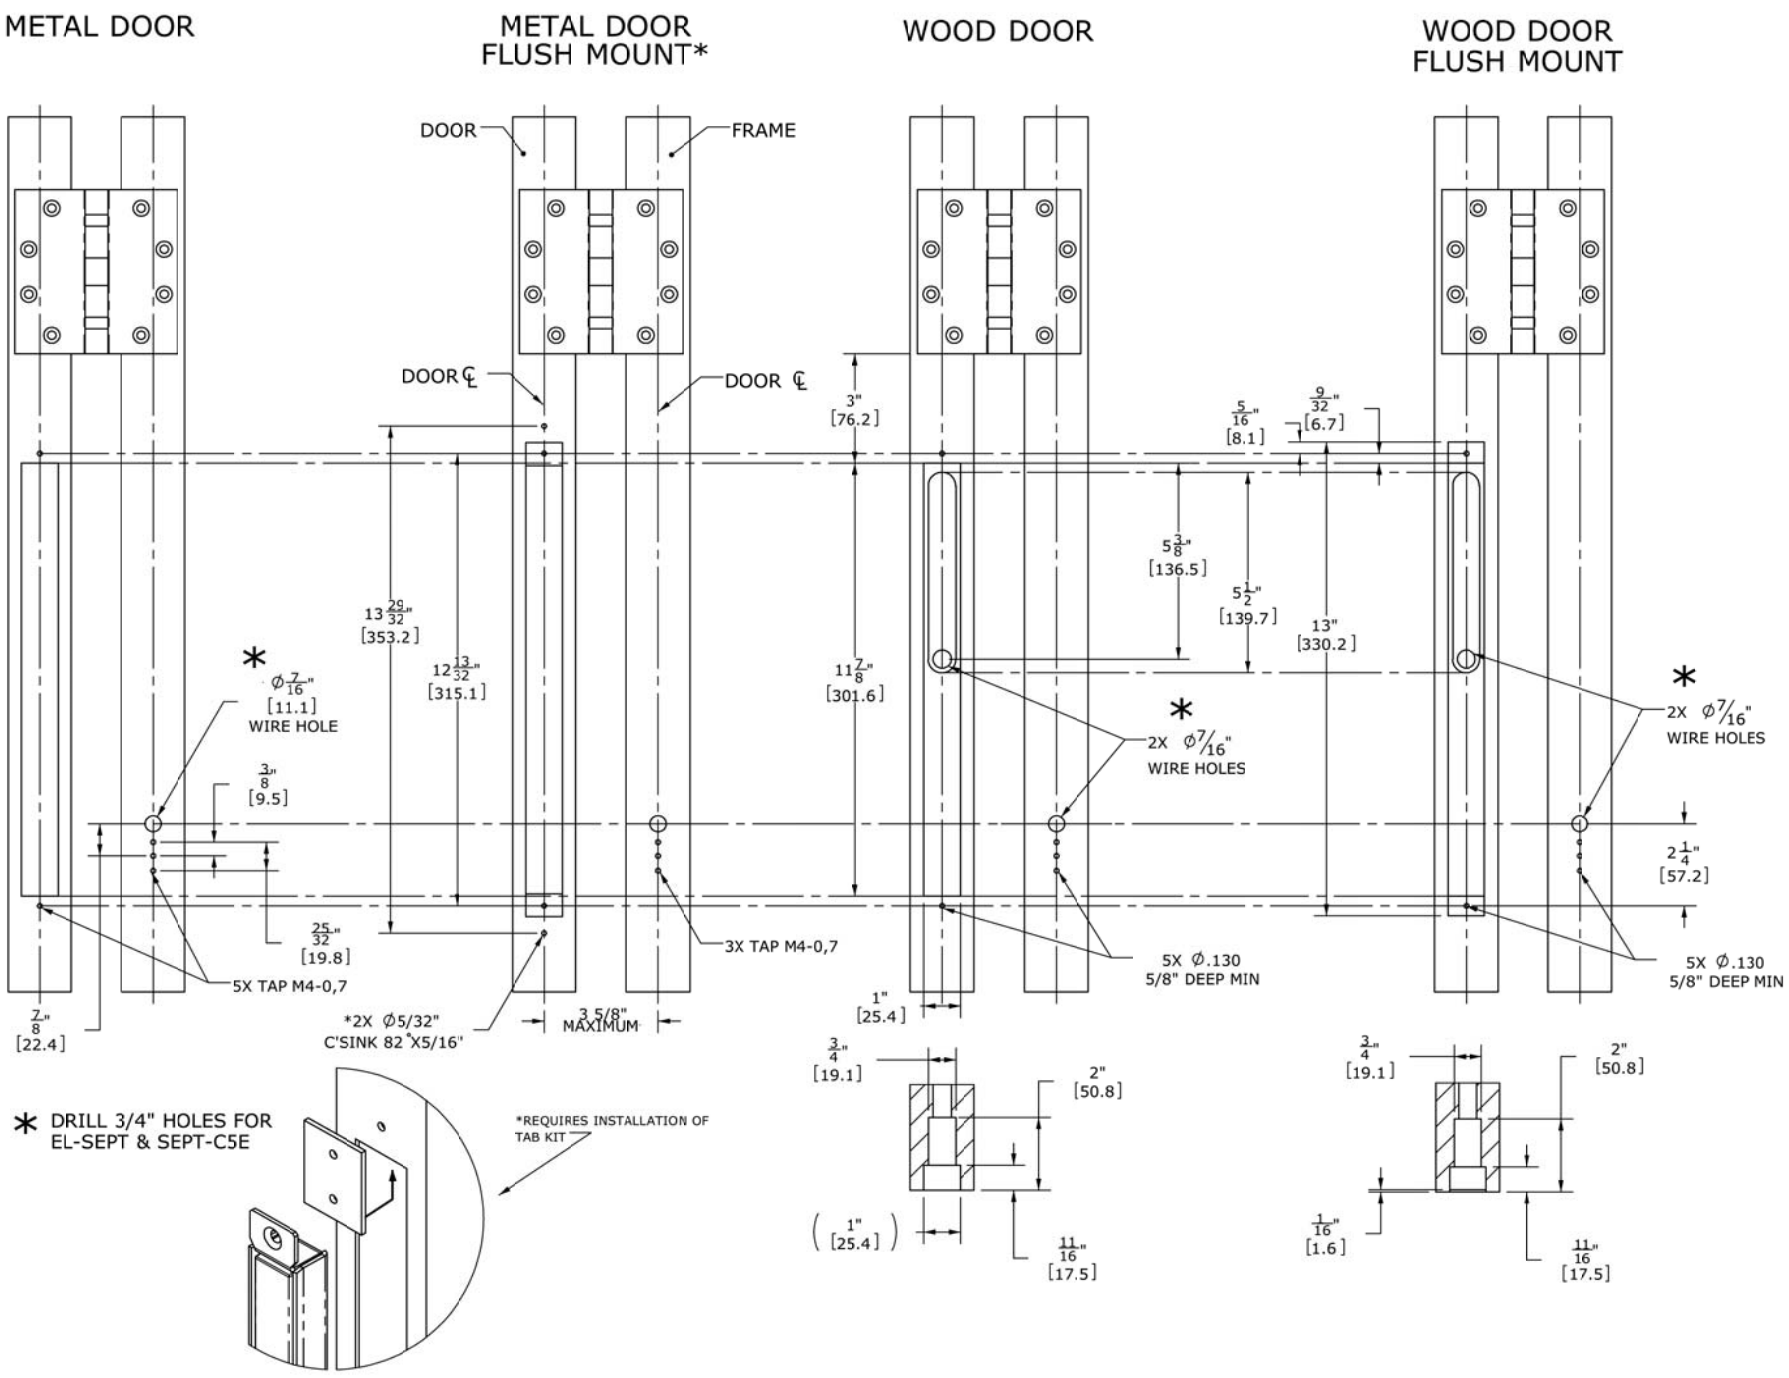
METAL DOOR
METAL DOOR
FLUSH MOUNT*
WOOD DOOR
WOOD DOOR
FLUSH MOUNT
DOOR
FRAME
DOOR ℄
DOOR ℄
3" [76.2]
5/16" [8.1]
9/32" [6.7]
5 3/8" [136.5]
5 1/2" [139.7]
13" [330.2]
13 29/32" [353.2]
12 13/32" [315.1]
11 7/8" [301.6]
* Ø7/16" [11.1] WIRE HOLE
3/8" [9.5]
25/32" [19.8]
5X TAP M4-0,7
7/8" [22.4]
*2X Ø5/32" C'SINK 82° X5/16"
3.5/8" MAXIMUM
3X TAP M4-0,7
* 2X Ø7/16" WIRE HOLES
5X Ø.130 5/8" DEEP MIN
* 2X Ø7/16" WIRE HOLES
2 1/4" [57.2]
5X Ø.130 5/8" DEEP MIN
1" [25.4]
3/4" [19.1]
2" [50.8]
(1" [25.4])
11/16" [17.5]
3/4" [19.1]
2" [50.8]
1/16" [1.6]
11/16" [17.5]
* DRILL 3/4" HOLES FOR EL-SEPT & SEPT-C5E
*REQUIRES INSTALLATION OF TAB KIT