
SECURITRON
ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions



MODEL SP-1	A	B	C
	5.75	3.187	1.5
NOTE:ALL DIMENSIONS IN INCHES.			

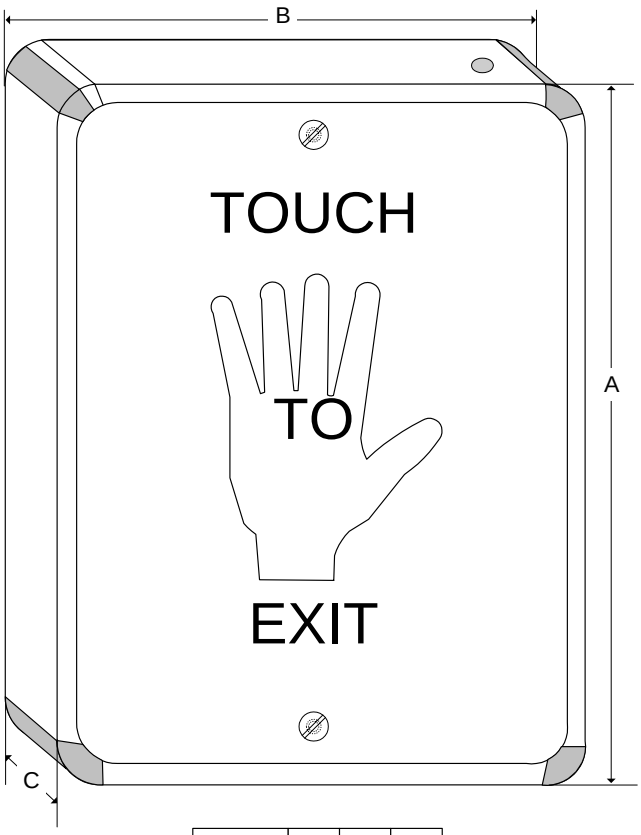

EXIT DEVICE - SP-1

Features

- Touch sense push panel with no moving parts
- Indoor use only
- Oversized unit so that it may be mounted over a single gang cutout
- Three part vinyl decal is included
- Red LED is incorporated in the back box
- Optional decal w/ handicap symbol for ADA compliant systems is available
- DPST 2 amp rated relay
- Built in redundant button
- 12 or 24 VDC
- Low current draw

Operating Temperature

0 to 43C [32 to 110F]

How to Order

Part #	Description
SP-1	Touch Sense Plate

© 2015, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company.

EXIT DEVICE - SP-1 (cont'd)

Architectural Specifications

A. The Touch Sense Plate shall be produced by an ISO 9001 certified manufacturer.

B. The exit device shall consist of a Stainless Steel - 630/US32D plate mounted on a plastic isolation box with 16'ft. of 20AWG 6 conductor cable.

C. The act of touching the plate shall release the locking device via a DP/ST 2 Amp relay output.

D. An internal timer shall be provided to release the lock for up to 25 seconds.

E. Lock release is indicated by an LED.

F. A built-in redundant button shall be provided.

G. A three part decal shall be provided to indicate function of the device.

H. The exit device must operate on 12 or 24 VDC.