
Armored Cable



Armored Cable


- PN 5702 3/16” Inside Diameter. Squarelok. Non-magnetic.
- PN 8449 5/16” Inside Diameter. Squarelok. Non-magnetic.
- PN 8296 7/32" Inside Diameter. SquareLok. Non-Magnetic.
- Custom Lengths
- Strung or Unstrung

Bulk Stainless Steel Armored Cable

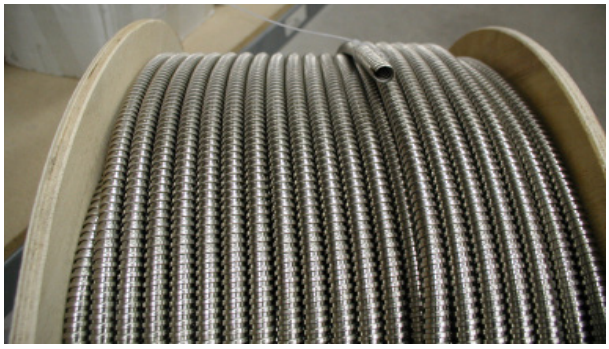

G.R.I offers three different stainless steel SquareLok armored cable sizes and is capable of producing our commercial and industrial switches with special length leads to fit our customers' requirements. The cable is also available by the foot; strung or unstrung. Contact your G.R.I. Distributor or call factory for more information and quotes.

SquareLok Style (SL)



SquareLok tubing is produced from a continuous metal strip, and is held in position by locking one leg of one profile over the leg of the adjacent profile.

Part Number	Size	Inside Diameter	Outside Diameter	Coiling Diameter	Weight	Breaking Load
5702	3/16" 5mm	0.188" 4.76mm	0.266" 6.76mm	1.750" 44.45mm	0.036 lb/ft 0.054 kg/m	185 lbs 84 kgs
8296	7/32" 5.5mm	0.218" 5.55mm	0.303" 7.7mm	1.750" 44.45mm	0.042 lb/ft 0.63 kg/m	210 lbs 96 kgs
8449	5/16" 8mm	0.313" 7.94mm	0.410" 10.91mm	2.000" 50.80mm	0.065 lb/ft 0.095 kg/m	220 lbs 100kg


Dimensional Tolerance is +/- 0/008 inches (.2mm) Breaking load may vary 10%.
Other sizes available upon request.

Armored Cable Accessories

Part Numbers:	
8868	Water Resistant Armored Cable Electrical Knock-out Junction Box Connector. Fits 5702 & 8296
8979	Water Resistant Armored Cable Electrical Junction Box Connector. Fits 8449.
8949	Steel Cable Clamp - .25 Diameter
8950	Steel Cable Clamp - .312 Diameter
8681	Nylon Cable Clamp - 1/4" Diameter
7412	Nylon Cable Clamp - 5/16" Diameter



8868/8979



Steel Cable Clamp
8949 - .25 dia.
8950 - .312 dia.



Nylon Cable Clamp
8681 - 1/4" dia.
7412 - 5/16" dia.

GEORGE RISK INDUSTRIES, INC.
G.R.I. PLAZA
KIMBALL, NE 69145

BA-228 Rev E 10/23/2013

MADE IN U.S.A.

TOLL-FREE 1-800-445-5218 • 1-800-523-1227
(308) 235-4645 • FAX (308) 235-3561
E-MAIL: sales@grisk.com
WEB SITE: www.grisk.com